


## Table of Contents

---

<b>General Applications</b>	<b>2-4</b>		
 <b>North American</b>	<b>5</b>	 <b>British BS 88</b>	<b>79</b>
FWA 130V 1000-4000A	6-7	240V 6-900A	80-81
FWA 150V 70-1000A	8-9	690V 6-700A	82-83
FWX 250V 35-2500A	10-11	Accessories	84
FWH 500V 35-1600A	12-13	Time-Current &	
KAC 600V 1-1000A	14	Peak Let-Through Curves	85-89
KBC 600V 35-800A	15		
FWP 700V 5-1200A	16-17	 <b>Ferrule</b>	<b>91</b>
FWJ 1000V 35-2000A	18-19	FWA 150V 5-60A	92
Accessories	20	FWX 250V 1-30A	93
Time-Current &		FWH 500V 0.25-30A	94-95
Peak Let-Through Curves	21-26	FWC 600V 6-32A	96
 <b>Square Body</b>	<b>27</b>	FWP 660V/700V 1-100A	97-98
Applications	28-29	FWK 750V 5-60A	99
DIN 43 653	30-43	FWJ 1000V 20-30A	100
DIN 43 620	44-49	FWL/FWS 1250/1500/2000V 2-30A	101
Flush End Contact	50-59	Accessories	102
French Style	60-61	Time-Current &	
US Style	62-67	Peak Let-Through Curves	103-108
Accessories	68-69		
Time-Current &			
Peak Let-Through Curves	70-78		

---

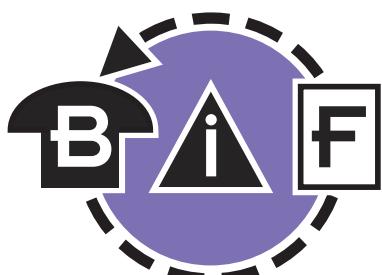

**Bussmann  
Information Fax ~  
636.527.1450**

**Get the latest, most up-to-date specification data  
on products listed in this catalog by calling  
Bussmann Information Fax.**

**BIF** is a simple to use automated fax response system. No need to wait for normal business hours; **BIF** is available around the clock for your convenience. All you need is a touch-tone telephone and a fax machine to get specification data when you want it.

A **BIF** document number is indicated with each product in this catalog. To get a detailed specification sheet simply call **636-527-1450** and follow the prompts. In a matter of minutes, a data sheet will be faxed to you. It's that simple!

**Bussmann Worldwide Web ~ <http://www.bussmann.com>**



# Square Body

## Introduction



## Table of Contents

	<b>Voltage</b>	<b>Page</b>
<b>Applications</b>		28-29
<b>Fuse Style</b>		
DIN 43 653	690V 1000V 1250V	30-35 36-39 40-43
DIN 43 620	690V 1000V	44-47 48-49
Flush End Contact	690V 1000V 1250V	50-55 56-57 58-59
French Style	690V	60-61
US Style	690V 1000V 1250V	62-63 64-65 66-67
<b>Accessories</b>		
Indicator System		68
Fuse Bases		69
<b>Curves</b>		
Time-Current & Peak Let-Through		70-78

## General Information

Designed and tested to:

- IEC 60269: Part 4
- U.L. Recognized

Bussmann offers a complete range of Square Body style fuses and accessories. Their unique design and construction provide:

- Minimal energy let-through ( $I^2t$ )
- Low operating temperature
- Low watts loss

Square Body style fuses are a very attractive solution for high power applications which require a compact design with superior performance. The construction and design of Square Body style fuses make it easy for Bussmann to manufacture custom products. Our cataloged offering provides only a sample of the wide variety of product which is available.

Each Square Body style fuse is available with a number of different end fittings. Options include:

- DIN 43 653
- DIN 43 620
- Flush End (Metric/U.S.)
- French Style
- US Style

### Voltage Rating

All Bussmann Square Body style fuses are tested to IEC 60269: Part 4. This standard requires a test voltage which is 5% higher than the rated voltage. In North America, fuses are required to clear only their rated voltage.

### Accessories

Square Body style fuses are available with three different open fuse indicator systems. Options include visual indication and indication utilizing a microswitch. Fuseblocks are also available for most applications.

<b>Voltage</b>	<b>AC</b>	<b>DC</b>	<b>Ampere Range</b>
690	X	—	10-7500
1000	X	—	20-1400
1250	X	—	50-1400



For complete specification data, visit our Web site at [www.bussmann.com](http://www.bussmann.com)  
or call Bussmann Information Fax ~ 636.527.1450



## Square Body Applications

### Maximum Permissible Load Current

The rated current value of Bussmann fuses is based on the ambient temperature in the space immediately below the fuse of 20°C. The following graph gives correction factors (k) for a range of temperatures (-40°C to +80°C). Maximum permissible continuous load currents can be calculated by applying the following formula:

$$I_b \leq I_n \times k \times (1 + 0.05 V) \times K_b$$

where

- $I_b$**  = Maximum permissible continuous load current
- $I_n$**  = Rated current of fuse
- k** = Temperature correction factor
- v** = Velocity of cooling air in m/s (max. 5 m/s).
- $K_b$**  = Fuse load constant 1.0

The maximum permissible continuous load current  $I_b$  of a fuse can be checked empirically (i.e., by satisfying the formula below) by making simple voltage and temperature measurements under actual operating conditions after the fuse has been installed in its operating location and loaded at the calculated  $I_b$  value:

$$\frac{E_2}{E_1} \times (0.92 + 0.004t) \leq N$$

where

**$E_1$**  = Voltage drop across fuse after 5 seconds


**$E_2$**  = Voltage drop across fuse after 2 hours

**t** = Air temperature at start of test (°C)

**N** = Constant

Fuse Rated Voltage (IEC)	N
690	1.5
1250	1.6

Temperature Correction Curve

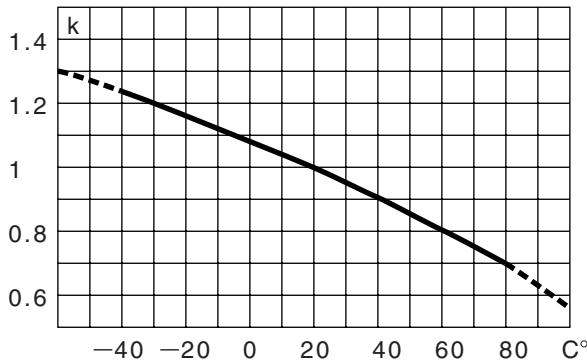

### Body Cross Section

Standard fuse program includes barrels with different cross sections.

Size	000	00	1*	1	2	3	4
Maximum Cross-section mm	21 x 36	30 x 47	45 x 45	53 x 53	61 x 61	76 x 76	105 x 105



## Square Body Applications

### Example Application of Square Body High Speed Fuses

#### Subject to Overload and Impulse Loading

Select a short-blade indicating fuse with indicator/adapter to permit the use of a single-pole microswitch for remote indication and determine if the fuse selected will meet the following application parameters.

#### Application Parameters

##### Load Currents Expected

Load Type	Duration	Frequency of Occurrence	Amperes
(1) Normal	Continuous	—	300A
(2) Overload	60 Seconds	Once Per Hour	500A
(3a)	10 Seconds	2-3 Times Per Week	
(3b)	20 Seconds (max.)	Once Per Month	700A
(4) Impulse	0.5 Seconds	Less Than Once Per Month	1100A

##### Voltage Data

(5) Voltage Applied to Fuse During Fault Conditions	400V (+10%)
---	-------------

##### Temperature Data

(6) Temperature Inside Cubicle in Which Fuse is Located (Natural Convection Cooling Only)	60°C
---	------

##### Thyrister Data


(7) Thyrister Peak Voltage Withstand	1000V
(8) Thyrister $I^2t$ Withstand at 10 Milliseconds*	90,000A <sup>2</sup> s

\*Note: The  $I^2t$  withstand of the thyristor may be given for other impulse durations (i.e., 1.5 ms, 3.5 ms, or 8.3 ms); however, the stated fuse  $I^2t$  is valid for all impulse durations of 10 ms or less.

#### Application Procedure

Step	Procedure	Remarks
(1) Select a short-blade fuse to permit mounting of microswitch MSW710-1S or 170H0069	1.1 Taking into consideration only the continuous load current and ambient temperature, from Table on page 54 tentatively select fuse 170M3669 400A, 690V.	—
(2) Determine $I^2t$ (total clearing) at 440V.	2.1 See Table, page 54. Note $I^2t$ is 105,000A <sup>2</sup> s at rated voltage of 660V. 2.2 From the figure on page 55, note that correction factor $K = 0.65$ . 2.3 $I^2t_{660V} \times K = I^2t_{440V}$ $105,000 \times 0.65 = 68,250$	OK
(3) Determine maximum arc voltage at 440V	3.1 From the figure on page 55, note that maximum voltage at 440V is 925V	OK
(4) Determine maximum permissible continuous load current $I_b$ .	4.1 Per page 28 data, $I_b = I_n \times k \times (1 + 0.05V) \times K_b$ $I_b = 400A \times 0.8 \times (1 + 0) \times 1$ $I_b = 320A$	—
(5) Plot a "line profile" showing the expected load and overload currents. Determine that overload and impulse load currents do not exceed their maximum permissible values.	5.0 Calculate $I_{max}$ per Table, page 4, for each overload and impulse load.	—
(Item 2)	5.1 $I_{max} < 60\% \times I_t$ 500A < 60% $\times$ 950A 500A < 570A	OK
(Item 3a)	5.2 $I_{max} < 60\% \times I_t$ 700A < 60% $\times$ 1360A 700A < 780A	OK
(Item 3b)	5.3 $I_{max} < 70\% \times I_t$ 700A < 70% $\times$ 1150A 700A < 805A	OK
(Item 4)	5.4 $I_{max} < 70\% \times I_t$ 1100A < 70% $\times$ 1800A 1100A < 1260A	OK

The tentatively selected fuse 170M3669 with microswitch 170H0069 meets all application parameters; no further selection would be necessary.

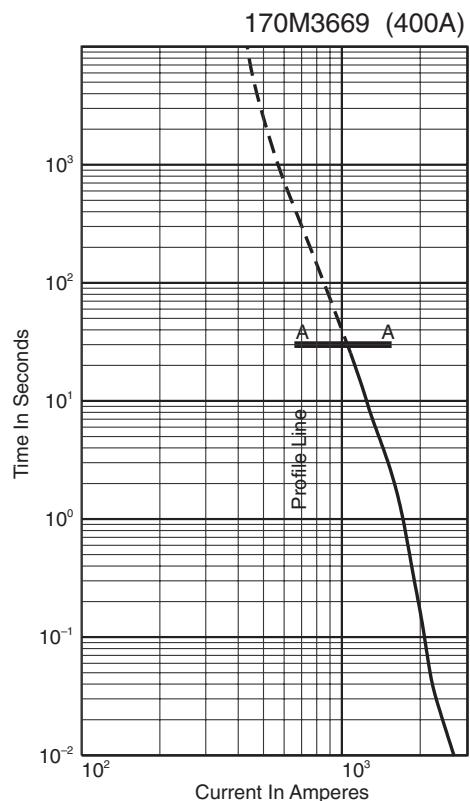

#### Calculation of Watt Loss

From the Table on page 54, watt loss at 400 amperes is 60 watts. The continuous load current of 300 amperes is 75% of rated current (400 amperes). From page 55, the correction factor  $K_p = 0.5$ .

$$\begin{aligned}\text{Watt Loss}_{75\%} &= \text{Watt Loss}_{100\%} \times K_p \\ &= 60W \times 0.5 \\ &= 30 \text{ watts}\end{aligned}$$

#### Special Fuses

Other high speed fuses are available from Bussmann with voltage ratings of 380 to 10,000 volts and current ratings up to 10,000 Amp in a single unit configuration. Fuses can be supplied with open fuse, "pin" indicators. Various types of microswitches are also available (see page 58).




**Square Body - DIN 43 653**
**690V/700V (IEC/U.L.) 10-400A**


Electrical Characteristics						Ordering Information				Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> Sec)		Watts Loss	-U/80 Without Indicator	-/80 Visual Indicator	-TN/80 Type T Indicator for Micro	Carton Qty.	Weight (kg)	See Page or (Datasheet)	
		Pre-arc	Clearing at 660V								
000	10	3.8	25.5	3.0	170M1308	170M1358	170M1408	10	1.34	page 70 (720048)	
	16	7.2	48	5.5	170M1309	170M1359	170M1409				
	20	11.5	78	7	170M1310	170M1360	170M1410				
	25	19	130	9	170M1311	170M1361	170M1411				
	32	40	270	10	170M1312	170M1362	170M1412				
	40	69	460	12	170M1313	170M1363	170M1413				
	50	115	770	15	170M1314	170M1364	170M1414				
	63	215	1450	16	170M1315	170M1365	170M1415				
	80	380	2550	19	170M1316	170M1366	170M1416				
	100	695	4650	24	170M1317	170M1367	170M1417				
	125	1200	8500	28	170M1318	170M1368	170M1418				
	160	2300	16000	32	170M1319	170M1369	170M1419				
	200	4200	28000	37	170M1320	170M1370	170M1420				
	250	7750	51500	42	170M1321	170M1371	170M1421				
	315	12000	80500	52	170M1322	170M1372	170M1422				
00	25	19	130	6		170M2608	170M2658	5	1.05	page 70 (720049)	
	32	28.5	195	7		170M2609	170M2659				
	40	50	360	9		170M2610	170M2660				
	50	95	640	10		170M2611	170M2661				
	63	170	1200	12		170M2612	170M2662				
	80	310	2100	15		170M2613	170M2663				
	100	620	4150	20		170M2614	170M2664				
	125	1000	6950	25		170M2615	170M2665				
	160	1900	13000	30		170M2616	170M2666				
	200	3400	23000	35		170M2617	170M2667				
	250	6250	42000	45		170M2618	170M2668				
	315	10000	68500	55		170M2619	170M2669				
	350	13500	91500	60		170M2620	170M2670				
	400	18000	125000	70		170M2621	170M2671				

† U.L. Recognition/CSA Component Acceptance on Size 000.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

■ Watts loss provided at rated current.

■ Microswitch indicator ordered separately. See accessories on pages 68-69.



## Square Body - DIN 43 653


**690V/700V (IEC/U.L.) 10-400A**



### Electrical Characteristics


#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

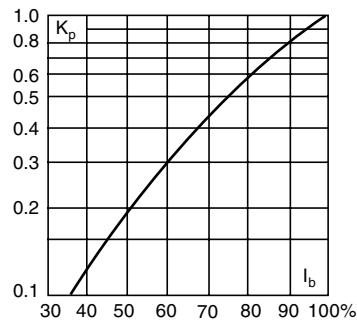


### Dimensions

DIN 43 653: Type -U/80, -/80, -TN/80

Size	D	E	F	G	H	K
000	40	21	20	51	8	2
00	51	30	28	67	10	2

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

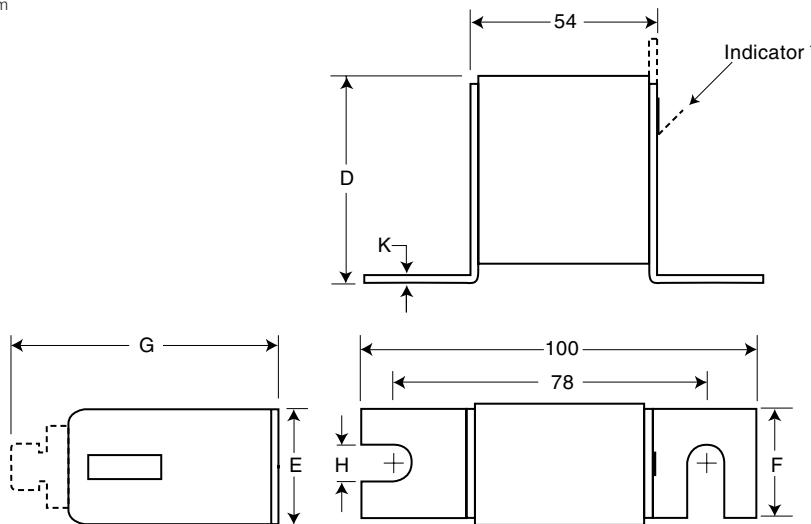

\* Indication for Size 00 fuses is a red pin.





Bussmann®



## Square Body - DIN 43 653

690V/700V (IEC/U.L.) 40-2000A



Electrical Characteristics				Ordering Information					Curves		
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	-/80 Visual Indicator	-TN/80 Type T Indicator for Micro	-/110 Visual Indicator	-TN/110 Type T Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 660V								
1*	40	40	270	9	170M3008	170M3058	170M3158	170M3208	5	1.50	page 71 (720050)
	50	77	515	11	170M3009	170M3059	170M3159	170M3209			
	63	115	770	14	170M3010	170M3060	170M3160	170M3210			
	80	185	1250	18	170M3011	170M3061	170M3161	170M3211			
	100	360	2450	21	170M3012	170M3062	170M3162	170M3212			
	125	550	3700	26	170M3013	170M3063	170M3163	170M3213			
	160	1100	7500	30	170M3014	170M3064	170M3164	170M3214			
	200	2200	15000	35	170M3015	170M3065	170M3165	170M3215			
	250	4200	28500	40	170M3016	170M3066	170M3166	170M3216			
	315	7000	46500	50	170M3017	170M3067	170M3167	170M3217			
	350	10000	68500	55	170M3018	170M3068	170M3168	170M3218			
	400	15000	105000	60	170M3019	170M3069	170M3169	170M3219			
	450	21000	140000	65	170M3020	170M3070	170M3170	170M3220			
	500	27000	180000	70	170M3021	170M3071	170M3171	170M3221			
	550	34000	230000	75	170M3022	170M3072	170M3172	170M3222			
	630	48500	325000	80	170M3023	170M3073	170M3173	170M3223			
1	200	1650	11500	45	170M4008	170M4058	170M4158	170M4208	3 (-/80) 2 (-/110)	1.29 0.94	page 71 (720051)
	250	3100	21000	55	170M4009	170M4059	170M4159	170M4209			
	315	6200	42000	58	170M4010	170M4060	170M4160	170M4210			
	350	8500	59000	60	170M4011	170M4061	170M4161	170M4211			
	400	13500	91500	65	170M4012	170M4062	170M4162	170M4212			
	450	17000	120000	70	170M4013	170M4063	170M4163	170M4213			
	500	25000	170000	72	170M4014	170M4064	170M4164	170M4214			
	550	34000	230000	75	170M4015	170M4065	170M4165	170M4215			
	630	52000	350000	80	170M4016	170M4066	170M4166	170M4216			
	700	69500	465000	85	170M4017	170M4067	170M4167	170M4217			
	800	105000	725000	95	170M4018	170M4068	170M4168	170M4218			
	900	155000	#850000	100	170M4019	170M4069	170M4169	170M4219			
2	400	11000	74000	65	170M5008	170M5058	170M5158	170M5208	2	1.20	page 72 (720052)
	450	15500	105000	70	170M5009	170M5059	170M5159	170M5209			
	500	21500	145000	75	170M5010	170M5060	170M5160	170M5210			
	550	28000	190000	80	170M5011	170M5061	170M5161	170M5211			
	630	41000	275000	90	170M5012	170M5062	170M5162	170M5212			
	700	60500	405000	95	170M5013	170M5063	170M5163	170M5213			
	800	86000	575000	105	170M5014	170M5064	170M5164	170M5214			
	900	125000	840000	110	170M5015	170M5065	170M5165	170M5215			
	1000	180000	1250000	115	170M5016	170M5066	170M5166	170M5216			
	1100	245000	1600000	120	170M5017	170M5067	170M5167	170M5217			
	1250	365000	2400000	130	170M5018	170M5068	170M5168	170M5218			
3	500	14000	95000	95	170M6008	170M6058	170M6158	170M6208	2 (-/80) 1 (-/110)	1.66 0.89	page 72 (720053)
	550	19500	135000	100	170M6009	170M6059	170M6159	170M6209			
	630	31000	210000	105	170M6010	170M6060	170M6160	170M6210			
	700	44500	300000	110	170M6011	170M6061	170M6161	170M6211			
	800	69500	465000	115	170M6012	170M6062	170M6162	170M6212			
	900	100000	670000	120	170M6013	170M6063	170M6163	170M6213			
	1000	140000	945000	125	170M6014	170M6064	170M6164	170M6214			
	1100	190000	1300000	130	170M6015	170M6065	170M6165	170M6215			
	1250	290000	1950000	140	170M6016	170M6066	170M6166	170M6216			
	1400	370000	2450000	155	170M6017	170M6067	170M6167	170M6217			
	1500	460000	3100000	160	170M6018	170M6068	170M6168	170M6218			
	1600	580000	3900000	160	170M6019	170M6069	170M6169	170M6219			
	1800	880000	†5250000	165	170M6020	170M6070	170M6170	170M6220			
	2000	1150000	†6350000	175	170M6021	170M6071	170M6171	170M6221			

■ Interrupting rating 200kA (Estimated 300kA)RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) †600V †550V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg




# Square Body - DIN 43 653 690V/700V (IEC/U.L.) 40-2000A



## Electrical Characteristics


### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).




### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (RMS) at a power factor of 15%.



### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>P</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

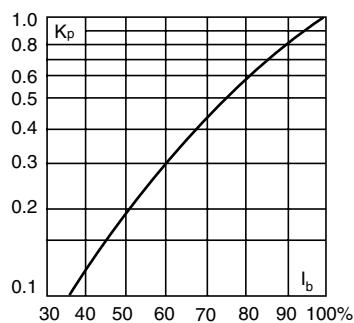

## Dimensions


DIN 43 653: Type -/80, -TN/80, -/110, -TN/110

Size	A	B	B\$	C	C\$	D	E	H
1*	50	104	134	78	108	58	45	22
1	50	108	138	78	108	66	53	25
2	50	108	138	78	108	75	61	25
3	51	109	139	78	108	90	76	30

\*Valid for fuses type -/110, -TN/110

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

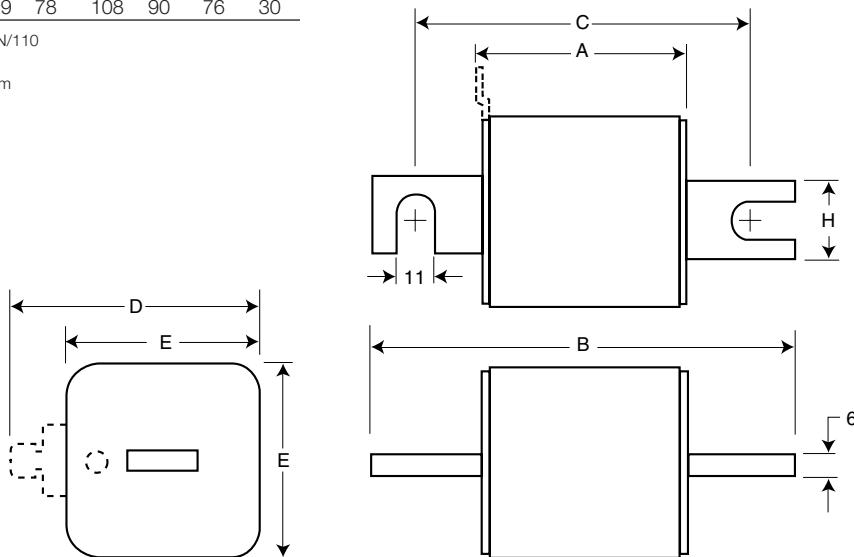



Bussmann®



## Square Body - DIN 43 653

690V/700V (IEC/U.L.) 40-2000A



Electrical Characteristics				Ordering Information				Curves		
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	-KN/80 Type K Indicator for Micro	-KN/110 Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)	
		Pre-arc	Clearing at 660V							
1*	40	40	270	9	170M3108	170M3258	5	1.60	page 71 (720054)	
	50	77	515	11	170M3109	170M3259				
	63	115	770	14	170M3110	170M3260				
	80	185	1250	18	170M3111	170M3261				
	100	360	2450	21	170M3112	170M3262				
	125	550	3700	26	170M3113	170M3263				
	160	1100	7500	30	170M3114	170M3264				
	200	2200	15000	35	170M3115	170M3265				
	250	4200	28500	40	170M3116	170M3266				
	315	7000	46500	50	170M3117	170M3267				
	350	10000	68500	55	170M3118	170M3268				
	400	15000	105000	60	170M3119	170M3269				
	450	21000	140000	65	170M3120	170M3270				
	500	27000	180000	70	170M3121	170M3271				
	550	34000	230000	75	170M3122	170M3272				
	630	48500	325000	80	170M3123	170M3273				
1	200	1650	11500	45	170M4108	170M4258	3 (-/80)	1.38	page 71 (720055)	
	250	3100	21000	55	170M4109	170M4259				
	315	6200	42000	58	170M4110	170M4260				
	350	8500	59000	60	170M4111	170M4261				
	400	13500	91500	65	170M4112	170M4262				
	450	17000	120000	70	170M4113	170M4263				
	500	25000	170000	72	170M4114	170M4264		2 (-/110)		
	550	34000	230000	75	170M4115	170M4265				
	630	52000	350000	80	170M4116	170M4266				
	700	69500	465000	85	170M4117	170M4267				
	800	105000	725000	95	170M4118	170M4268				
	±900	155000	±850000	100	170M4119	170M4269				
2	400	11000	74000	65	170M5108	170M5258	2	1.26	page 72 (720056)	
	450	15500	105000	70	170M5109	170M5259				
	500	21500	145000	75	170M5110	170M5260				
	550	28000	190000	80	170M5111	170M5261				
	630	41000	275000	90	170M5112	170M5262				
	700	60500	405000	95	170M5113	170M5263				
	800	86000	575000	105	170M5114	170M5264				
	900	125000	840000	110	170M5115	170M5265				
	1000	180000	1250000	115	170M5116	170M5266				
	1100	245000	1600000	120	170M5117	170M5267				
	1250	365000	2400000	130	170M5118	170M5268				
3	500	14000	95000	95	170M6108	170M6258	1	0.92	page 72 (720057)	
	550	19500	135000	100	170M6109	170M6259				
	630	31000	210000	105	170M6110	170M6260				
	700	44500	300000	110	170M6111	170M6261				
	800	69500	465000	115	170M6112	170M6262				
	900	100000	670000	120	170M6113	170M6263				
	1000	140000	945000	125	170M6114	170M6264				
	1100	190000	1300000	130	170M6115	170M6265				
	1250	290000	1950000	140	170M6116	170M6266				
	1400	370000	2450000	155	170M6117	170M6267				
	1500	460000	3100000	160	170M6118	170M6268				
	1600	580000	3900000	160	170M6119	170M6269				
±1800	880000	±5250000	165	170M6120	170M6270	1	0.92			
	±2000	1150000	±6350000	175	170M6121	170M6271				

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) ±600V ±550V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg



## Square Body - DIN 43 653


**690V/700V (IEC/U.L.) 40-2000A**



### Electrical Characteristics

#### Total Clearing I<sup>2</sup>t


The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).

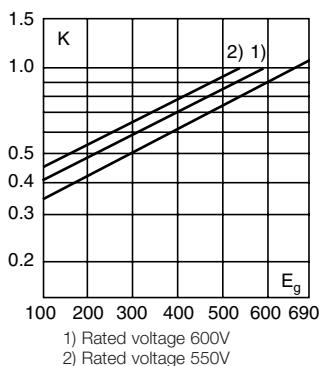

1) Rated voltage 600V  
2) Rated voltage 550V


#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>P</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

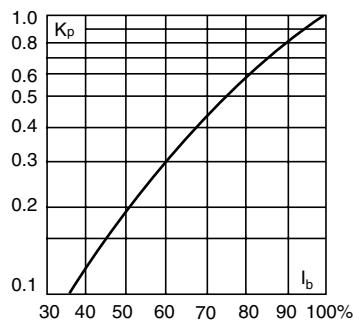

### Dimensions


DIN 43 653: Type -KN/80, -KN/110

Size	A	B	B <sup>§</sup>	C	C <sup>§</sup>	D	E	H
1*	50	104	134	78	108	59	45	22
1	50	108	138	78	108	69	53	25
2	50	108	138	78	108	77	61	25
3	51	109	139	78	108	92	76	30

\*Valid for fuse type -KN/110.

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

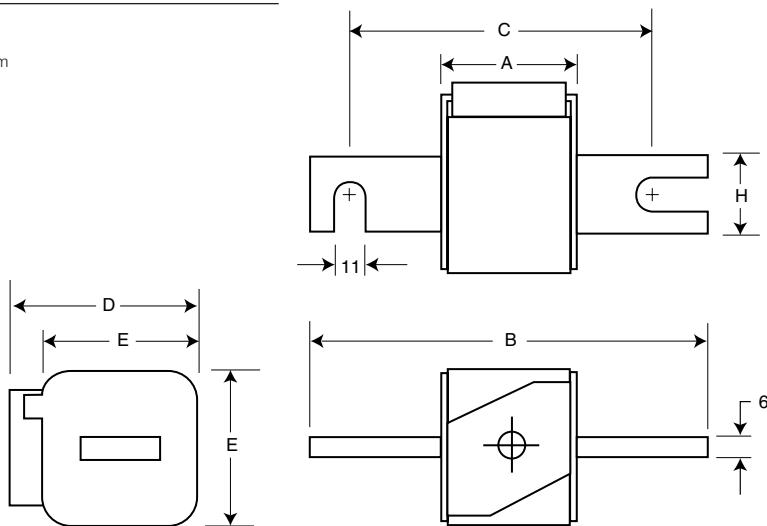



Bussmann®



**Square Body - DIN 43 653**  
**1000V (IEC) 20-315A**

Size	Rated Voltage	Rated Current RMS-Amps	Electrical Characteristics		Watts Loss	00/80 Visual Indicator	Ordering Information		Curves
			I <sup>2</sup> t (A <sup>2</sup> s)	Clearing at Rated Voltage			Pre-arc	00TN/80 Type T Indicator for Micro	
00	1000	20	20	140	5	170M4802	170M4822	6	Page 73
	1000	25	30	210	7	170M4803	170M4823		
	1000	32	55	390	9	170M4804	170M4824		
	1000	35	69	500	10	170M4805	170M4825		
	1000	40	100	690	11	170M4806	170M4826		
	1000	50	170	1200	13	170M4807	170M4827		
	1000	63	280	2000	18	170M4808	170M4828		
	1000	80	500	3500	22	170M4809	170M4829		
	1000	100	950	6850	25	170M4810	170M4830		
	1000	125	1500	11500	33	170M4811	170M4831		
	1000	160	3000	22000	37	170M4812	170M4832		
	1000	200	5600	40500	40	170M4813	170M4833		
	1000	250	10000	74000	48	170M4814	170M4834		
	900	315	18000	115000	58	170M4815	170M4835		

1 kg = 2.2 lbs. 1 lb = 0.45 kg

- Interrupting rating 150kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch ordered separately. See accessories on page 68-69.






## Square Body - DIN 43 653 1000V (IEC) 20-315A

### Electrical Characteristics

#### Total clearing $I^2t$


The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).

\*Rated voltage 900V




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

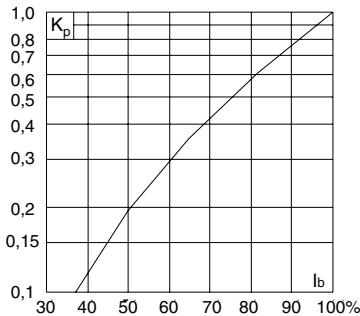


### Dimensions

DIN 43 653: Type 00TN/80 – 00/80

Size	Max A	B	C	D	Max E	F	G	H
00/80	54	98	78	51	30	28	10	
00TN/80	54	98	78	51	30	28	67	10

Dimensions in mm  
1 mm = 0.0394"    1" = 25.4 mm

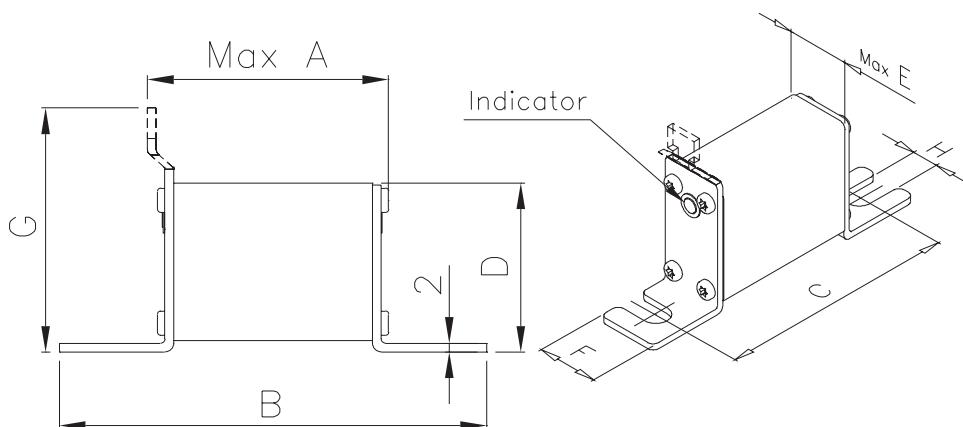



Bussmann®



**Square Body - DIN 43 653**  
**1000V (IEC) 50-1400A**

Electrical Characteristics						Ordering Information				Curves
Size	Rated Voltage	Rated Current RMS-Amps	I <sup>t</sup> (A <sup>2</sup> s)		Watts Loss	-KN110 Type K Indicator for Micro	-TN110 Type T Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
			Pre-arc	Clearing at Rated Voltage						
1*	1000	50	135	815	20	170M3965	170M3981	6	2.7	Page 74 or (720058)
	1000	63	215	1300	25	170M3966	170M3982			
	1000	80	460	2750	30	170M3967	170M3983			
	1000	100	860	5100	35	170M3968	170M3984			
	1000	125	1450	8600	40	170M3969	170M3985			
	1000	160	2850	17500	45	170M3970	170M3986			
	1000	200	4950	29500	48	170M3971	170M3987			
	1000	250	9550	57000	50	170M3972	170M3988			
	1000	315	21500	130000	60	170M3973	170M3989			
	1000	350	29000	175000	65	170M3974	170M3990			
1	1000	400	42000	250000	70	170M3975	170M3991			
	1000	160	2200	13500	40	170M4965	170M4980	3	2.1	Page 75 or (720059)
	1000	200	4150	24500	45	170M4966	170M4981			
	1000	250	7750	46000	52	170M4967	170M4982			
	1000	315	16500	98500	60	170M4968	170M4983			
	1000	350	21500	130000	65	170M4969	170M4984			
	1000	400	31000	185000	70	170M4970	170M4985			
	1000	450	44500	265000	80	170M4971	170M4986			
	1000	500	63000	375000	85	170M4972	170M4987			
	1000	550	84500	500000	90	170M4973	170M4988			
2	1000	630	125000	755000	98	170M4974	170M4989			
	1000	250	6750	40000	65	170M5966	170M5981	3	2.7	Page 75 or (720060)
	1000	315	13500	81500	75	170M5967	170M5982			
	1000	350	16500	99000	80	170M5968	170M5983			
	1000	400	26000	155000	85	170M5969	170M5984			
	1000	450	35500	210000	90	170M5970	170M5985			
	1000	500	49500	295000	95	170M5971	170M5986			
	1000	550	66000	390000	100	170M5972	170M5987			
	1000	630	93500	555000	110	170M5973	170M5988			
	1000	700	130000	770000	115	170M5974	170M5989			
3	1000	800	195000	1200000	125	170M5975	170M5990			
	1000	315	9200	54500	90	170M8614	170M8629	1	1.5	Page 76 or (720061)
	1000	350	13000	77500	95	170M8615	170M8630			
	1000	400	19000	115000	105	170M8616	170M8631			
	1000	450	27000	160000	107	170M8617	170M8632			
	1000	500	37500	225000	110	170M8618	170M8633			
	1000	550	52000	310000	115	170M8619	170M8634			
	1000	630	82500	490000	120	170M8620	170M8635			
	1000	700	115000	700000	125	170M8621	170M8636			
	1000	800	170000	1050000	135	170M8622	170M8637			
	1000	900	250000	1500000	145	170M8623	170M8638			
	1000	1000	340000	2050000	150	170M8624	170M8639			
	1000	1100	460000	2750000	155	170M8625	170M8640			
	1000	1250	575000	3400000	175	170M8626	170M8641			
	900	1400	795000	4200000	185	170M8627	170M8642			

1 kg = 2.2 lbs. 1 lb = 0.45 kg

- Interrupting rating 150kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch ordered separately. See accessories on page 68-69.




## Square Body - DIN 43 653 1000V (IEC) 50-1400A

### Electrical Characteristics

#### Total clearing $I^2t$


The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).

\*Rated voltage 900V




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

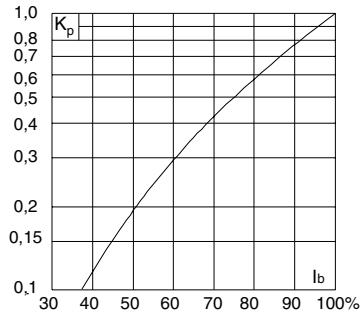

### Dimensions

DIN 43 653 Type -KN/110 and -TN/110


Size	A	B	C	Max D1	E	G	H	I
1*KN/110	80	138	108	61	43	6	22	11
1KN/110	80	138	108	69	51	6	25	11
2KN/110	80	138	108	77	59	6	25	11
3KN/110	81	139	108	92	74	6	30	11

Size	A	B	C	Max D2	E	G	H	I
1*TN/110	80	138	108	61	43	6	22	11
1TN/110	80	138	108	69	51	6	25	11
2TN/110	80	138	108	75	59	6	25	11
3TN/110	81	139	108	90	74	6	30	11


Dimensions in mm

1 mm = 0.0394" 1" = 25.4 mm

#### KN/110

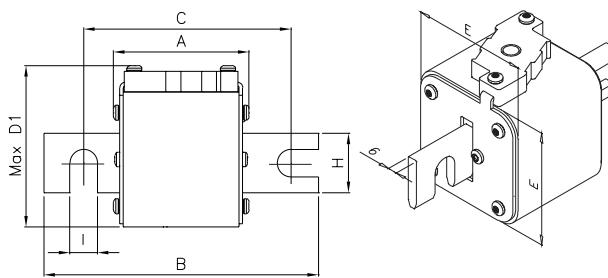

#### TN/110

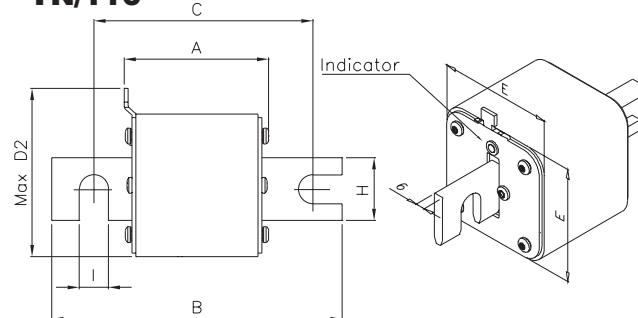


**Square Body - DIN 43 653**
**1250V/1300V (IEC/U.L.) 50-1400A**


Electrical Characteristics						Ordering Information			Curves
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)			Watts Loss	-/110 Visual Indicator	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 1000V	Clearing at 1250V					
1*	50	135	815	1100	15	170M3138	170M3188		
	63	215	1300	1750	20	170M3139	170M3189		
	80	420	2500	3350	25	170M3140	170M3190		
	100	750	4450	5950	30	170M3141	170M3191		
	125	1450	9000	11500	35	170M3142	170M3192		
	160	2600	16000	21000	40	170M3143	170M3193	5	page 76 (720062)
	200	5150	31000	41000	45	170M3144	170M3194		
	250	9200	54500	73000	55	170M3145	170M3195		
	315	18500	115000	150000	60	170M3146	170M3196		
	350	27000	165000	220000	65	170M3147	170M3197		
1	400	53000	265000	335000	70	170M3148	170M3198		
	160	1900	11500	15500	45	170M4138	170M4188		
	200	3800	22500	30000	50	170M4139	170M4189		
	250	7750	46000	61500	60	170M4140	170M4190		
	315	15000	90000	120000	65	170M4141	170M4191		
	350	20000	125000	165000	70	170M4142	170M4192	2	page 77 (720063)
	400	29500	175000	235000	75	170M4143	170M4193		
	450	42000	250000	335000	80	170M4144	170M4194		
	500	69500	340000	435000	85	170M4145	170M4195		
	550	95000	465000	590000	95	170M4146	170M4196		
2	†630	130000	660000		100	170M4147	170M4197		
	250	6500	38500	51500	65	170M5138	170M5188		
	280	9350	55500	74500	70	170M5139	170M5189		
	315	13000	77500	105000	75	170M5140	170M5190		
	350	16500	97500	135000	80	170M5141	170M5191		
	400	23000	140000	180000	85	170M5142	170M5192		
	450	34000	205000	270000	90	170M5143	170M5193	2	page 77 (720064)
	500	48000	285000	380000	95	170M5144	170M5194		
	550	62000	370000	495000	100	170M5145	170M5195		
	630	115000	575000	730000	110	170M5146	170M5196		
	700	160000	795000	1050000	115	170M5147	170M5197		
3	800	245000	1200000		120	170M5148	170M5198		
	†900	360000	1750000	1550000	125	170M5149	170M5199		
	†1000	480000	2350000		135	170M5150	170M5200		
	315	9500	58000	77500	85	170M6138	170M6188		
	350	13500	81500	110000	90	170M6139	170M6189		
	400	19500	120000	160000	95	170M6140	170M6190		
	450	31000	185000	245000	100	170M6141	170M6191		
	500	39000	235000	310000	105	170M6142	170M6192		
	550	55000	325000	435000	110	170M6143	170M6193		
	630	83500	495000	665000	115	170M6144	170M6194	1	page 78 (720065)
3	700	115000	705000	940000	120	170M6145	170M6195		
	‡800	205000	995000	1300000	125	170M6146	170M6196		
	‡900	305000	1500000	1900000	130	170M6147	170M6197		
	‡1000	450000	2150000	2750000	135	170M6148	170M6198		
	‡1100	575000	2800000	3600000	140	170M6149	170M6199		
	‡1250	810000	3950000		145	170M6150	170M6200		
	‡1400	1250000	6000000		150	170M6151	170M6201		

■ Interrupting rating 100kA RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) †1100V ‡1250V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg



## Square Body - DIN 43 653


**1250V/1300V (IEC/U.L.) 50-1400A**



### Electrical Characteristics

#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).

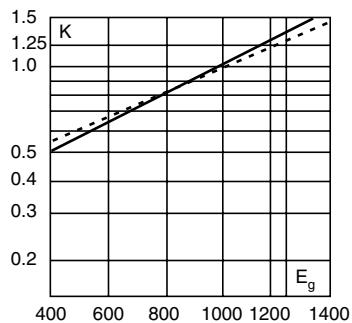


Dashed lines apply to the following amperages:

Size	1*	1	2	3
Amp	400	500-630	630-1000	800-1400


#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.

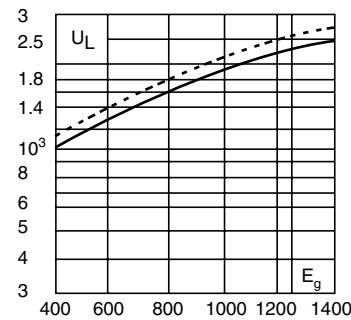

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

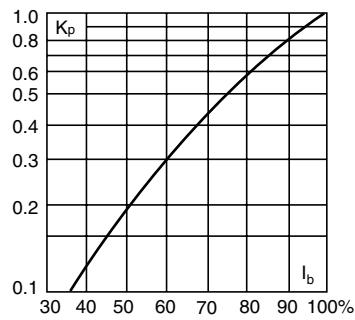


### Dimensions

DIN 43 653: Type -/110, -TN/110

Size	A	B	D	E	H
1*	80	138	58	45	20
1	80	138	66	53	25
2	80	138	75	61	25
3	81	139	90	76	30

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

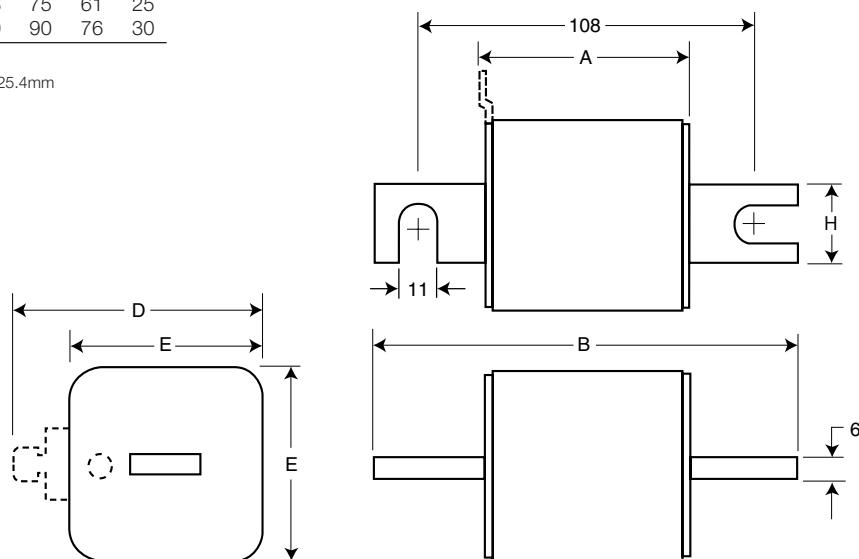


**Square Body - DIN 43 653**
**1250V/1300V (IEC/U.L.) 50-1400A**


Electrical Characteristics						Ordering Information			Curves
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)			Watts Loss	-KN/110 Type K Visual Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 1000V	Clearing at 1250V					
1*	50	135	815	1100	15	170M3238	2	0.84	page 76 (720066)
	63	215	1300	1750	20	170M3239			
	80	420	2500	3350	25	170M3240			
	100	750	4450	5950	30	170M3241			
	125	1450	9000	11500	35	170M3242			
	160	2600	16000	21000	40	170M3243			
	200	5150	31000	41000	45	170M3244			
	250	9200	54500	73000	55	170M3245			
	315	18500	115000	150000	60	170M3246			
	350	27000	165000	220000	65	170M3247			
1	400	53000	265000	335000	70	170M3248			
	160	1900	11500	15500	45	170M4238	2	1.26	page 77 (720067)
	200	3800	22500	30000	50	170M4239			
	250	7750	46000	61500	60	170M4240			
	315	15000	90000	120000	65	170M4241			
	350	20000	125000	165000	70	170M4242			
	400	29500	175000	235000	75	170M4243			
	450	42000	250000	335000	80	170M4244			
	500	69500	340000	435000	85	170M4245			
	550	95000	465000	590000	95	170M4246			
2	†630	130000	660000	100	170M4247				
	250	6500	38500	51500	65	170M5238	2	1.66	page 77 (720068)
	280	9350	55500	74500	70	170M5239			
	315	13000	77500	105000	75	170M5240			
	350	16500	97500	135000	80	170M5241			
	400	23000	140000	180000	85	170M5242			
	450	34000	205000	270000	90	170M5243			
	500	48000	285000	380000	95	170M5244			
	550	62000	370000	495000	100	170M5245			
	630	115000	575000	730000	110	170M5246			
3	700	160000	795000	1050000	115	170M5247			
	800	245000	1200000	1550000	120	170M5248			
	†900	360000	1750000	1750000	125	170M5249			
	†1000	480000	2350000	135	170M5250				
	315	9500	58000	77500	85	170M6238	1	1.27	page 78 (720069)
	350	13500	81500	110000	90	170M6239			
	400	19500	120000	160000	95	170M6240			
	450	31000	185000	245000	100	170M6241			
	500	39000	235000	310000	105	170M6242			
	550	55000	325000	435000	110	170M6243			
	630	83500	495000	665000	115	170M6244			
	700	115000	705000	940000	120	170M6245			
	‡800	205000	995000	1300000	125	170M6246			
	‡900	305000	1500000	1900000	130	170M6247			
■	‡1000	450000	2150000	2750000	135	170M6248			
	‡1100	575000	2800000	3600000	140	170M6249			
	‡1250	810000	3950000	145	170M6250				
	‡1400	1250000	6000000	150	170M6251				

■ Interrupting rating 100kA RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) ‡1100V ‡1250V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg



## Square Body - DIN 43 653


**1250V/1300V (IEC/U.L.) 50-1400A**



### Electrical Characteristics


#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor,  $K$ , given as a function of applied working voltage,  $E_g$ , (RMS).

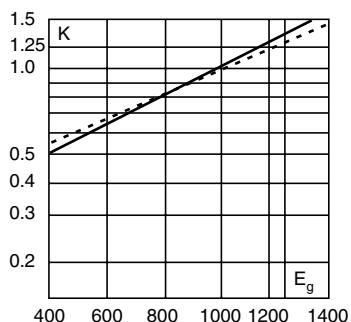


#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

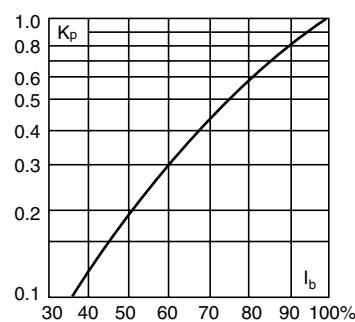

Dashed lines apply to the following amperages:

Size	1*	1	2	3
Amp	400	500-630	630-1000	800-1400


### Dimensions

DIN 43 653: Type -KN/110

Size	A	B	D	E	H
1*	80	138	59	45	20
1	80	138	69	53	25
2	80	138	77	61	25
3	81	139	92	76	30

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

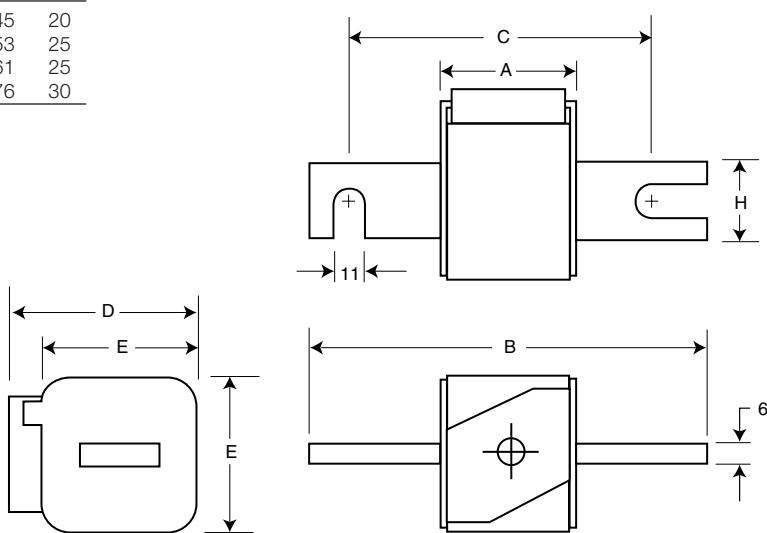


**Square Body – DIN 43 620**
**690V (IEC/U.L.)**
**10-315A**


Size	Rated Current RMS-Amps	Electrical Characteristics		Watts Loss	Ordering Information		Curves
		I <sup>2</sup> t (A <sup>2</sup> S)	Clearing at 660V		DIN 000 Type T Indicator for Micro	Carton Qty.	
000	10	3.8	25.5	3.0	170M1558	10	page 70
	16	7.2	48	5.5	170M1559		
	20	11.5	78	7	170M1560		
	25	19	130	9	170M1561		
	32	40	270	10	170M1562		
	40	69	460	12	170M1563		
	50	115	770	15	170M1564		
	63	215	1450	16	170M1565		
	80	380	2550	19	170M1566		
	100	695	4650	24	170M1567		
	125	1200	8500	28	170M1568		
	160	2300	16000	32	170M1569		
	200	4200	28000	37	170M1570		
	250	7750	51500	42	170M1571		
	315	12000	80500	52	170M1572		

- Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

### Rated Current

The rated current of this fuse range has been given with copper conductors that have a current density of 1.3 A/mm<sup>2</sup> (IEC 60269-4). For conductor cross section according to IEC 60269-1, the fuses with a rated current higher than 125A must be derated. Please contact Bussmann for application assistance.



**Square Body - DIN 43 620**

**690V (IEC/U.L.)**


**10-315A**



## Electrical Characteristics


### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).




### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



### Power Losses


Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

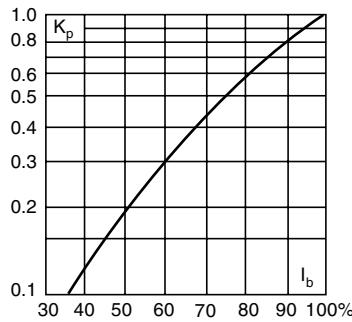

## Dimensions

DIN 43 620: Type DIN 000

Dimension in mm.  
1mm = 0.0394"    1" = 25.4mm

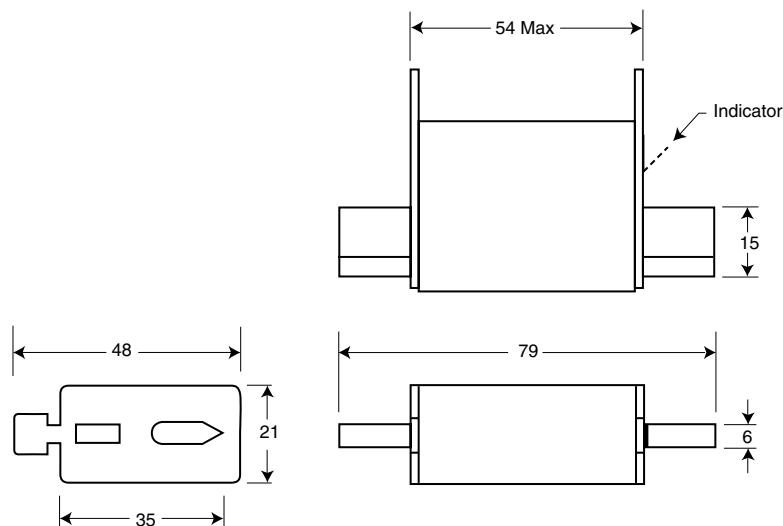


**Square Body – DIN 43 620**
**690V/700V (IEC/U.L.) 40-1000A**


Electrical Characteristics				Ordering Information			Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	DIN Type T Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 660V					
1*	40	40	270	9	170M3808	5	1.85	page 71 (720070)
	50	77	515	11	170M3809			
	63	115	770	14	170M3810			
	80	185	1250	18	170M3811			
	100	360	2450	21	170M3812			
	125	550	3700	26	170M3813			
	160	1100	7500	30	170M3814			
	200	2200	15000	35	170M3815			
	250	4200	28500	40	170M3816			
	315	7000	46500	50	170M3817			
	350	10000	68500	55	170M3818			
	400	15000	105000	60	170M3819			
2	400	11000	74000	65	170M5808	5	3.00	page 72 (720071)
	450	15500	105000	70	170M5809			
	500	21500	145000	75	170M5810			
	550	28000	190000	80	170M5811			
	630	41000	275000	90	170M5812			
	700	60500	405000	95	170M5813			
3	500	14000	95000	95	170M6808	1	1.15	page 72 (720072)
	550	19500	135000	100	170M6809			
	630	31000	210000	105	170M6810			
	700	44500	300000	110	170M6811			
	800	69500	465000	115	170M6812			
	900	100000	670000	120	170M6813			
	1000	140000	945000	125	170M6814			

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

■ Watts loss provided at rated current.

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

### Rated Current

The rated current of this fuse range has been given with copper conductors that have a current density of 1.3 A/mm<sup>2</sup> (IEC 60269-4). For conductor cross section according to IEC 60269-1, the fuses must be derated. Please contact Bussmann for application assistance.




# Square Body - DIN 43 620 690V/700V (IEC/U.L.) 40-1000A



## Electrical Characteristics


### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).




### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (RMS) at a power factor of 15%.



### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>P</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

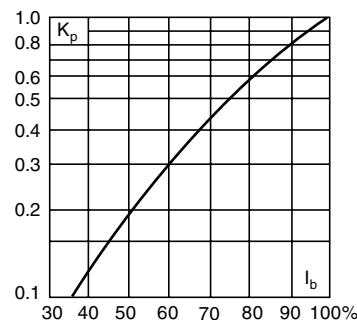


## Dimensions

DIN 43 620: Type DIN 1\*, DIN 2, DIN 3

Size	A	B	D	E	F	H
1*	69	135	58	45	40	20
2	69	150	71	55	48	26
3	68	150	88	76	60	33

Dimension in mm.  
1mm = 0.0394"    1" = 25.4mm

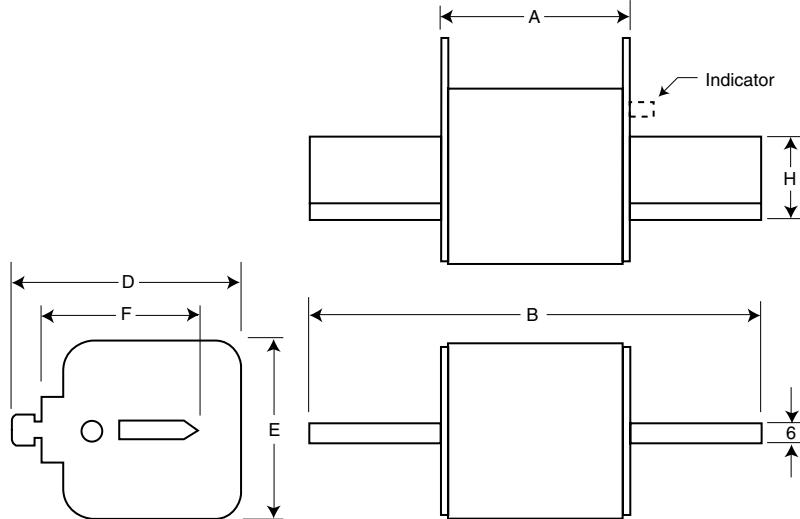

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.





Bussmann®



**Square Body - DIN 43 620**  
**1000V (IEC) 20–225A**

Size	Rated Voltage	Rated Current RMS-Amps	Electrical Characteristics			Type T Indicator for Micro	Ordering Information		Curves
			Pre-arc	I <sup>2</sup> t (A <sup>2</sup> s)	Clearing at Rated Voltage		Carton Qty.	Carton Weight (kg)	
00	1000	20	15	110	8.5	170M2673	6	1.3	Page 74
	1000	25	28.5	210	9.5	170M2674			
	1000	32	53	390	11	170M2675			
	1000	35	69	500	12	170M2676			
	1000	40	105	760	13	170M2677			
	1000	50	215	1550	14	170M2678			
	1000	63	380	2750	16	170M2679			
	1000	80	815	5900	18	170M2680			
	1000	100	1550	11500	21	170M2681			
	1000	125	3000	22000	23	170M2682			
	1000	160	6250	45000	26	170M2683			
	900	200	12000	86500	31	170M2684			
	900	225	18000	115000	33	170M2685			

1 kg = 2.2 lbs. 1 lb = 0.45 kg

- Interrupting rating 150kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch indicator ordered separately. See accessories on page 68-69.

#### Rated Current

The rated current of this fuse range is given with open fuse bases connected to copper conductors according to IEC 60269 Part 1, table 10.

When used in enclosed fuse bases/disconnects, derating factors have to be observed.

Please contact Bussmann for application assistance.






## Square Body - DIN 43 620 1000V (IEC) 20–225A

### Electrical Characteristics

#### Total clearing I<sup>2</sup>t


The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).

\*Rated voltage 900V




#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage E<sub>g</sub>, (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

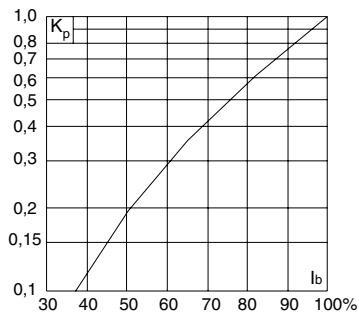


### Dimensions

DIN 43 620: Type DIN 00

Size	A	B	Max D	Max E	F	G	Min H
DIN 00	49	78,5	60	30	35	6	15

Dimensions in mm

1 mm = 0.0394" 1" = 25.4 mm

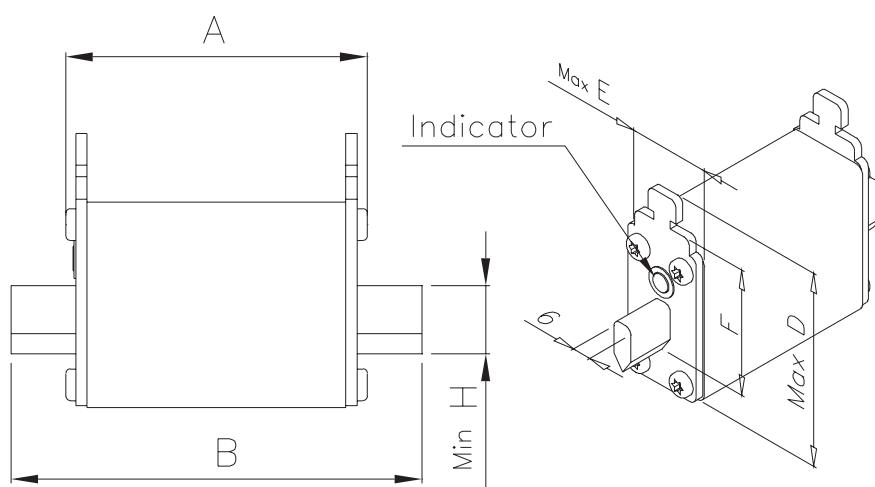

BIF document: 720045



For complete specification data, visit our Web site at [www.bussmann.com](http://www.bussmann.com)  
or call Bussmann Information Fax ~ 636.527.1450



**Square Body – Flush End Contact**  
**690V (IEC) 25-400A**

Electrical Characteristics					Ordering Information			Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	00B/60 Visual Indicator	00BTN/60 Type T Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page
		Pre-arc	Clearing at 660V						
00	25	19	130	6	170M2708	170M2758	5	1.35	page 70
	32	28.5	195	7	170M2709	170M2759			
	40	50	360	9	170M2710	170M2760			
	50	95	640	10	170M2711	170M2761			
	63	170	1200	12	170M2712	170M2762			
	80	310	2100	15	170M2713	170M2763			
	100	620	4150	20	170M2714	170M2764			
	125	1000	6950	25	170M2715	170M2765			
	160	1900	13000	30	170M2716	170M2766			
	200	3400	23000	35	170M2717	170M2767			
	250	6250	42000	45	170M2718	170M2768			
	315	10000	68500	55	170M2719	170M2769			
	350	13500	91500	60	170M2720	170M2770			
	400	18000	125000	70	170M2721	170M2771			

- Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg




## Square Body – Flush End Contact 690V (IEC) 25-400A

### Electrical Characteristics


#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor,  $K$ , given as a function of applied working voltage,  $E_g$ , (RMS).




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses


Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

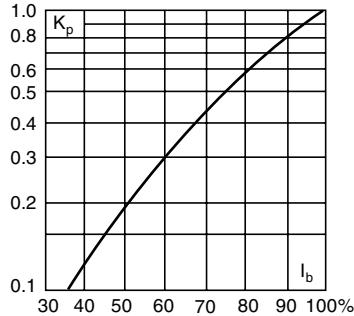

### Dimensions

Flush End Contact: Type 00B/60, 00BTN/60

Dimension in mm.  
1mm = 0.0394" 1" = 25.4mm

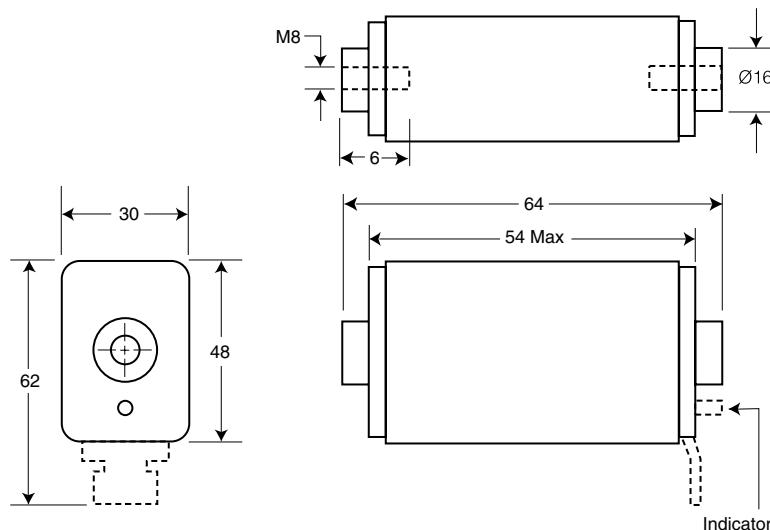



Bussmann®



**Square Body - Flush End Contact  
690V/700V (IEC/U.L.) 40-2000A**



Electrical Characteristics						Ordering Information				Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Losses at Rated Current	-B/-Visual Indicator	-BKN/-Type K Indicator for Micro	-G/-Visual Indicator	-GKN/-Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 660V								
1*	40	40	270	9	170M3408	170M3458	170M3508	170M3558	10 (-B/-)	2.40	page 71 (720073)
	50	77	515	11	170M3409	170M3459	170M3509	170M3559			
	63	115	770	14	170M3410	170M3460	170M3510	170M3560			
	80	185	1250	18	170M3411	170M3461	170M3511	170M3561			
	100	360	2450	21	170M3412	170M3462	170M3512	170M3562			
	125	550	3700	26	170M3413	170M3463	170M3513	170M3563			
	160	1100	7500	30	170M3414	170M3464	170M3514	170M3564			
	200	2200	15000	35	170M3415	170M3465	170M3515	170M3565			
	250	4200	28500	40	170M3416	170M3466	170M3516	170M3566			
	315	7000	46500	50	170M3417	170M3467	170M3517	170M3567			
	350	10000	68500	55	170M3418	170M3468	170M3518	170M3568			
	400	15000	105000	60	170M3419	170M3469	170M3519	170M3569			
	450	21000	140000	65	170M3420	170M3470	170M3520	170M3570			
	500	27000	180000	70	170M3421	170M3471	170M3521	170M3571			
	550	34000	230000	75	170M3422	170M3472	170M3522	170M3572			
	630	48500	325000	80	170M3423	170M3473	170M3523	170M3573			
1	200	1650	11500	45	170M4408	170M4458	170M4508	170M4558	6	2.40	page 71 (720074)
	250	3100	21000	55	170M4409	170M4459	170M4509	170M4559			
	315	6200	42000	58	170M4410	170M4460	170M4510	170M4560			
	350	8500	59000	60	170M4411	170M4461	170M4511	170M4561			
	400	13500	91500	65	170M4412	170M4462	170M4512	170M4562			
	450	17000	120000	70	170M4413	170M4463	170M4513	170M4563			
	500	25000	170000	72	170M4414	170M4464	170M4514	170M4564			
	550	34000	230000	75	170M4415	170M4465	170M4515	170M4565			
	630	52000	350000	80	170M4416	170M4466	170M4516	170M4566			
	700	69500	465000	85	170M4417	170M4467	170M4517	170M4567			
	800	105000	725000	95	170M4418	170M4468	170M4518	170M4568			
	‡900	155000	‡850000	100	170M4419	170M4469	170M4519	170M4569			
2	400	11000	74000	65	170M5408	170M5458	170M5508	170M5558	6	3.30	page 72 (720075)
	450	15500	105000	70	170M5409	170M5459	170M5509	170M5559			
	500	21500	145000	75	170M5410	170M5460	170M5510	170M5560			
	550	28000	190000	80	170M5411	170M5461	170M5511	170M5561			
	630	41000	275000	90	170M5412	170M5462	170M5512	170M5562			
	700	60500	405000	95	170M5413	170M5463	170M5513	170M5563			
	800	86000	575000	105	170M5414	170M5464	170M5514	170M5564			
	900	125000	840000	110	170M5415	170M5465	170M5515	170M5565			
	1000	180000	1250000	115	170M5416	170M5466	170M5516	170M5566			
	1100	245000	1600000	120	170M5417	170M5467	170M5517	170M5567			
	1250	365000	2400000	130	170M5418	170M5468	170M5518	170M5568			
3	500	14000	95000	95	170M6408	170M6458	170M6508	170M6558	3	2.52	page 72 (720076)
	550	19500	135000	100	170M6409	170M6459	170M6509	170M6559			
	630	31000	210000	105	170M6410	170M6460	170M6510	170M6560			
	700	44500	300000	110	170M6411	170M6461	170M6511	170M6561			
	800	69500	465000	115	170M6412	170M6462	170M6512	170M6562			
	900	100000	670000	120	170M6413	170M6463	170M6513	170M6563			
	1000	140000	945000	125	170M6414	170M6464	170M6514	170M6564			
	1100	190000	1300000	130	170M6415	170M6465	170M6515	170M6565			
	1250	290000	1950000	140	170M6416	170M6466	170M6516	170M6566			
	1400	370000	2450000	155	170M6417	170M6467	170M6517	170M6567			
	1500	460000	3100000	160	170M6418	170M6468	170M6518	170M6568			
	1600	580000	3900000	160	170M6419	170M6469	170M6519	170M6569			
	†1800	880000	†5250000	165	170M6420	170M6470	170M6520	170M6570			
	‡2000	1150000	‡6350000	175	170M6421	170M6471	170M6521	170M6571			

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) †600V ‡550V (Consult Bussmann for U.L. Recognition / CSA Component Acceptance Status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg




## Square Body - Flush End Contact 690V/700V (IEC/U.L.) 40-2000A



### Electrical Characteristics

#### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).




1) Rated voltage 600V

2) Rated voltage 550V


#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>P</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

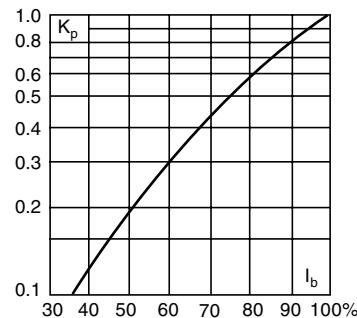

### Dimensions

Flush End Contact: Type -B/-, -BKN/-, -G/-, -GKN/-

Size	A	B	D	E	F	F <sup>\$</sup>	G	H
1*	50	51	59	45	M8	5/16" - 18 UNC-2B	5	ø17
1	50	51	69	53	M8	5/16" - 18 UNC-2B	8	ø20
2	50	51	77	61	M10	3/8" - 16 UNC-2B	10	ø24
3	51	53	92	76	M12	1/2" - 13 UNC-2B	10	ø30




<sup>\$</sup>Valid for fuses type -G/- & -GKN/-

NB: B = 65 for Size 2, 1100-1250A  
Size 3, 1600-2000A

Carton Quantity = 4      Carton Weight = 2.40 kg  
Carton Quantity = 2      Carton Weight = 1.82 kg

Dimension in mm.

1mm = 0.0394"    1" = 25.4mm





**Square Body - Flush End Contact  
690V (IEC) 1000-4000A**



Electrical Characteristics							Ordering Information					Curves	
Size	Rated Current RMS-Norm. Cool.	Rated Current RMS-Liquid Cool.	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss Norm. Cool.	Watts Loss Liquid Cool.	-B/- Visual Indicator	-BKN/-Type K Indicator for Micro	-G/- Visual Indicator	-GKN/-Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page
			Pre-arc	Clearing at 660V									
4	1000	1350	76000	505000	175	315	170M7058	170M7078	170M7098	170M7118	2	1.80	page 73
	1250	1700	145000	965000	195	355	170M7059	170M7079	170M7099	170M7119			
	1400	1900	205000	1400000	205	375	170M7060	170M7080	170M7100	170M7120			
	1600	2200	305000	2050000	220	405	170M7061	170M7081	170M7101	170M7121			
	2000	2700	600000	3950000	245	445	170M7062	170M7082	170M7102	170M7122			
	2500	3400	1200000	7800000	275	495	170M7063	170M7083	170M7103	170M7123			
	3000	4100	2000000	13500000	305	555	170M7064	170M7084	170M7104	170M7124			
	3500	4700	3250000	22000000	325	585	170M7065	170M7085	170M7105	170M7125			
	+4000	+5400	4700000	+28000000	355	640	170M7066	170M7086	170M7106	170M7126			

- Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Rated voltage (IEC) +500V
- Liquid Cool. = Liquid cooling. Temperature on the terminals not to exceed 60°C.
- Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg




# Square Body - Flush End Contact 690V (IEC) 1000-4000A



## Electrical Characteristics


### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).




### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

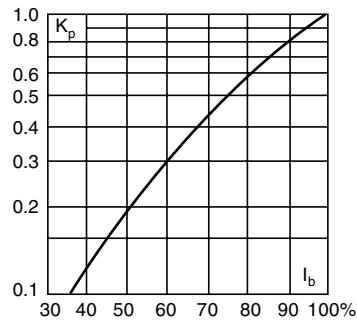


## Dimensions

Flush End Contact: Type 4B/-, 4BKN/-, 4G/-, 4GKN/-

Size	F	G
4B	M10 10 deep	33
4G	1/2" -13 UNC-2B 10 deep	38

Dimension in mm.  
1mm = 0.0394" 1" = 25.4mm

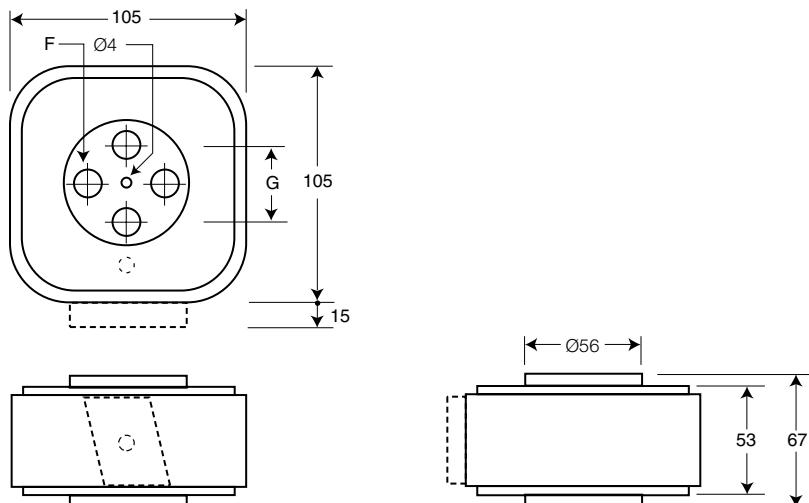



Bussmann®



**Square Body - Flush End Contact  
1000V (IEC) 50-1400A**

Electrical Characteristics						Ordering Information				Curves
Size	Rated Voltage	Rated Current RMS-Amps	I <sup>t</sup> (A <sup>2</sup> s)		Watts Loss	-BKN-/Type K Indicator for Micro	-GKN-/Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
			Pre-arc	Clearing at Rated Voltage						
1*	1000	50	135	815	20	170M3951	170M3921	6	2.35	Page 74 720077
	1000	63	215	1300	25	170M3952	170M3922			
	1000	80	460	2750	30	170M3953	170M3923			
	1000	100	860	5100	35	170M3954	170M3924			
	1000	125	1450	8600	40	170M3955	170M3925			
	1000	160	2850	17500	45	170M3956	170M3926			
	1000	200	4950	29500	48	170M3957	170M3927			
	1000	250	9550	57000	50	170M3958	170M3928			
	1000	315	21500	130000	60	170M3959	170M3929			
	1000	350	29000	175000	65	170M3960	170M3930			
1	1000	400	42000	250000	70	170M3961	170M3931			
	1000	160	2200	13500	40	170M4951	170M4921	6	3.5	Page 75 720078
	1000	200	4150	24500	45	170M4952	170M4922			
	1000	250	7750	46000	52	170M4953	170M4923			
	1000	315	16500	98500	60	170M4954	170M4924			
	1000	350	21500	130000	65	170M4955	170M4925			
	1000	400	31000	185000	70	170M4956	170M4926			
	1000	450	44500	265000	80	170M4957	170M4927			
	1000	500	63000	375000	85	170M4958	170M4928			
	1000	550	84500	500000	90	170M4959	170M4929			
2	1000	630	125000	755000	98	170M4960	170M4930			
	1000	250	6750	40000	65	170M5952	170M5922	3	2.5	Page 75 720079
	1000	315	13500	81500	75	170M5953	170M5923			
	1000	350	16500	99000	80	170M5954	170M5924			
	1000	400	26000	155000	85	170M5955	170M5925			
	1000	450	35500	210000	90	170M5956	170M5926			
	1000	500	49500	295000	95	170M5957	170M5927			
	1000	550	66000	390000	100	170M5958	170M5928			
	1000	630	93500	555000	110	170M5959	170M5929			
	1000	700	130000	770000	115	170M5960	170M5930			
3	1000	800	195000	1200000	125	170M5961	170M5931			
	1000	315	9200	54500	90	170M8600	170M8500	2	2.5	Page 76 720080
	1000	350	13000	77500	95	170M8601	170M8501			
	1000	400	19000	115000	105	170M8602	170M8502			
	1000	450	27000	160000	107	170M8603	170M8503			
	1000	500	37500	225000	110	170M8604	170M8504			
	1000	550	52000	310000	115	170M8605	170M8505			
	1000	630	82500	490000	120	170M8606	170M8506			
	1000	700	115000	700000	125	170M8607	170M8507			
	1000	800	170000	1050000	135	170M8608	170M8508			
	1000	900	250000	1500000	145	170M8609	170M8509			
	1000	1000	340000	2050000	150	170M8610	170M8510			
	1000	1100	460000	2750000	155	170M8611	170M8511			
	1000	1250	575000	3400000	175	170M8612*	170M8512*			
	900	1400	795000	4200000	185	170M8613*	170M8513*	1	1.5	

1 kg = 2.2 lbs. 1 lb = 0.45 kg

- Interrupting rating 150kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch ordered separately. See accessories on page 68-69.
- \*Overall length is 90 mm, for all other fuses the overall length is 75 mm.



## Square Body - Flush End Contact 1000V (IEC) 50–1400A




### Electrical Characteristics

#### Total clearing I<sup>2</sup>t


The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).

\*Rated voltage 900V




#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage E<sub>g</sub>, (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

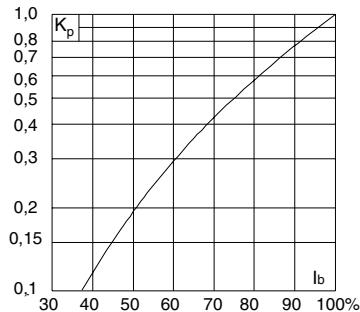

### Dimensions

Flush End Contact Type –BKN/- and –GKN/-

Size	A	B	Max D	E	F	F <sup>§</sup>	Min G	H
1*BKN/75+GKN/75	72.5	74	61	43	M8	5/16" – 18 UNC-2B	5	ø17.5
1BKN/75+GKN/75	73.2	74	69	52	M8	5/16" – 18 UNC-2B	8	ø20
2BKN/75+GKN/75	73.2	74.4	77	59	M10	3/8" – 16 UNC-2B	10	ø24
3BKN/75+GKN/75	73.3	75.4	92	74	M12	1/2" – 13 UNC-2B	10	ø30


  

Size	A	B	Max D	E	F	F <sup>§</sup>	Min G	H
3BKN/90+GKN/90	80.3	91.4	92	74	M12	1/2" – 13 UNC-2B	10	ø30

<sup>§</sup> Valid for fuses type –GKN/-

Dimensions in mm

1 mm = 0.0394" 1" = 25.4 mm

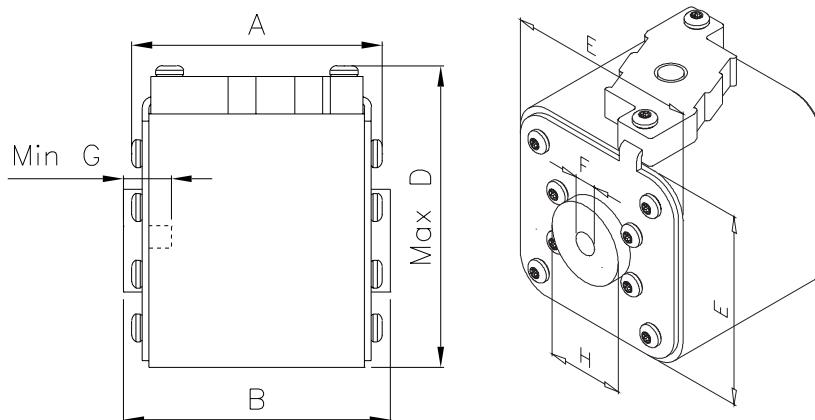



Bussmann®



## Square Body - Flush End Contact

1250V/1300V (IEC/U.L.) 50-1400A



Electrical Characteristics					Ordering Information					Curves
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)			Watts Loss	-BKN/75 Type K Indicator for Micro	-BKN/80 Type K Indicator for Micro	-BKN/90 Type K Indicator for Micro	-GKN/75 Type K Indicator for Micro	See Page or (Datasheet)
		Pre-arc	Clearing at 1000V	Clearing at 1250V						
1*	50	135	815	1100	15	170M3388	170M3438	170M3488	170M3488	page 76 (720081)
	63	215	1300	1750	20	170M3389	170M3439	170M3489	170M3489	
	80	420	2500	3350	25	170M3390	170M3440	170M3490	170M3490	
	100	750	4450	5950	30	170M3391	170M3441	170M3491	170M3491	
	125	1450	9000	11500	35	170M3392	170M3442	170M3492	170M3492	
	160	2600	16000	21000	40	170M3393	170M3443	170M3493	170M3493	
	200	5150	31000	41000	45	170M3394	170M3444	170M3494	170M3494	
	250	9200	54500	73000	55	170M3395	170M3445	170M3495	170M3495	
	315	18500	115000	150000	60	170M3396	170M3446	170M3496	170M3496	
	350	27000	165000	220000	65	170M3397	170M3447	170M3497	170M3497	
1	400	53000	265000	335000	70	170M3448				page 77 (720082)
	160	1900	11500	15500	45	170M4388	170M4438	170M4488	170M4488	
	200	3800	22500	30000	50	170M4389	170M4439	170M4489	170M4489	
	250	7750	46000	61500	60	170M4390	170M4440	170M4490	170M4490	
	315	15000	90000	120000	65	170M4391	170M4441	170M4491	170M4491	
	350	20000	125000	165000	70	170M4392	170M4442	170M4492	170M4492	
	400	29500	175000	235000	75	170M4393	170M4443	170M4493	170M4493	
	450	42000	250000	335000	80	170M4394	170M4444	170M4494	170M4494	
	500	69500	340000	435000	85	†170M4395	170M4445	†170M4495	†170M4495	
	550	95000	465000	590000	95	‡170M4396	170M4446	‡170M4496	‡170M4496	
2	630	130000	660000	100	‡170M4397	†170M4447	‡170M4497	‡170M4497	‡170M4497	page 77 (720083)
	250	6500	38500	51500	65	170M5388	170M5438	170M5588	170M5588	
	280	9350	55500	74500	70	170M5389	170M5439	170M5589	170M5589	
	315	13000	77500	105000	75	170M5390	170M5440	170M5590	170M5590	
	350	16500	97500	135000	80	170M5391	170M5441	170M5591	170M5591	
	400	23000	140000	180000	85	170M5392	170M5442	170M5592	170M5592	
	450	34000	205000	270000	90	170M5393	170M5443	170M5593	170M5593	
	500	48000	285000	380000	95	170M5394	170M5444	170M5594	170M5594	
	550	62000	370000	495000	100	170M5395	170M5445	170M5595	170M5595	
	630	115000	575000	730000	110	†170M5396	170M5446	†170M5596	170M5646	
3	700	160000	795000	1050000	115	†170M5397	†170M5447	†170M5597	170M5647	page 78 (720084)
	800	245000	1200000	1550000	120	‡170M5398	‡170M5448	‡170M5598	170M5648	
	900	360000	1750000		125				170M5649	
	1000	480000	2350000		135				170M5650	
	315	9500	58000	77500	85	170M6338	170M6538	170M6588	170M6588	
	350	13500	81500	110000	90	170M6339	170M6539	170M6589	170M6589	
	400	19500	120000	160000	95	170M6340	170M6540	170M6590	170M6590	
	450	31000	185000	245000	100	170M6341	170M6541	170M6591	170M6591	
	500	39000	235000	310000	105	170M6342	170M6542	170M6592	170M6592	
	550	55000	325000	435000	110	170M6343	170M6543	170M6593	170M6593	
3	630	83500	495000	665000	115	170M6344	170M6544	170M6594	170M6594	page 78 (720084)
	700	115000	705000	940000	120	170M6345	170M6545	170M6495	170M6495	
	800	205000	995000	1300000	125	†170M6346	170M6546	†170M6496	†170M6496	
	900	305000	1500000	1900000	130	†170M6347	†170M6547	†170M6497	†170M6497	
	1000	450000	2150000	2750000	135	‡170M6348	†170M6548	¥170M6498	¥170M6498	
	1100	575000	2800000	3600000	140	‡170M6349	†170M6549	¥170M6499	¥170M6499	
	1250	810000	3950000		145				170M6500	
	1400	1250000	6000000		150				170M6501	

■ Interrupting rating 100kA RMS Symmetrical.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

■ Watts loss provided at rated current.

■ Rated voltage (IEC) †1100V, ‡1000V, ¥1250V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Individual Fuse Weight: Size 1\* = 0.380 kg

Size 1 = 0.580 kg

Size 2 = 0.900 kg

Size 3 = 1.250 kg

■ Microswitch indicator ordered separately. See accessories on pages 68-69.




# Square Body - Flush End Contact 1250V/1300V (IEC/U.L.) 50-1400A



## Electrical Characteristics

### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (RMS).

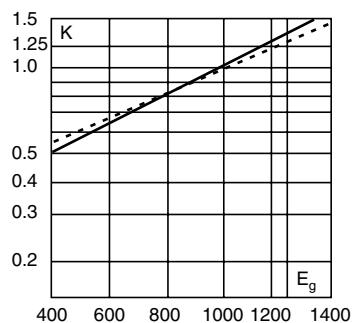


Dashed lines apply to the following amperages:

Size	1*	1	2	3
Amp	400	500-630	630-1000	800-1400


### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (RMS) at a power factor of 15%.




### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

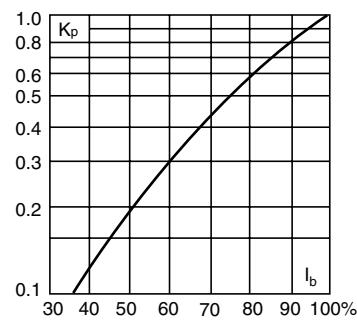

## Dimensions

Flush End Contact: Type -BKN/-, -GKN/-

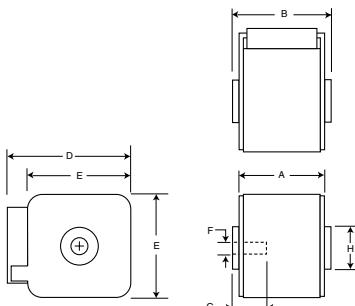

Size	Type	A	B	D	E	F	F\$	G	H
1*	BKN + GKN/75	74	75	59	45	M8	5/16" - 18 UNC-2B	5	.017
1*	BKN/80	80	81	59	45	M8		5	.017
1	BKN + GKN/75	74	75	69	53	M8	5/16" - 18 UNC-2B	8	.020
1	BKN/80	80	81	69	53	M8		8	.020
2	BKN + GKN/75	74	75	77	61	M10	3/8" - 16 UNC-2B	10	.024
2	BKN/80	80	81	77	61	M10		10	.024
2	BKN + GKN/90	80	91	77	61	M10	3/8" - 16 UNC-2B	10	.024
3	BKN + GKN/75	74	76	92	76	M12	1/2" - 13 UNC-2B	10	.030
3	BKN/80	81	83	92	76	M12		10	.030
3	BKN + GKN/90	81	91	92	76	M12	1/2" - 13 UNC-2B	10	.030

\*Valid for fuses type -GKN/-

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm





Bussmann®

**Square Body – French Style****690V/700V (IEC/U.L.) 40-1500A**

Electrical Characteristics				Ordering Information				Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	-E/ Type T Indicator For Micro	-EKN/ Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 660V						
1*	40	40	270	9	170M3308	170M3358	1	0.300	page 71 (720085)
	50	77	515	11	170M3309	170M3359			
	63	115	770	14	170M3310	170M3360			
	80	185	1250	18	170M3311	170M3361			
	100	360	2450	21	170M3312	170M3362			
	125	550	3700	26	170M3313	170M3363			
	160	1100	7500	30	170M3314	170M3364			
	200	2200	15000	35	170M3315	170M3365			
	250	4200	28500	40	170M3316	170M3366			
	315	7000	46500	50	170M3317	170M3367			
	350	10000	68500	55	170M3318	170M3368			
	400	15000	105000	60	170M3319	170M3369			
	450	21000	140000	65	170M3320	170M3370			
	500	27000	180000	70	170M3321	170M3371			
1	200	1650	11500	45	170M4308	170M4358	1	0.470	page 71 (720086)
	250	3100	21000	55	170M4309	170M4359			
	315	6200	42000	58	170M4310	170M4360			
	350	8500	59000	60	170M4311	170M4361			
	400	13500	91500	65	170M4312	170M4362			
	450	17000	120000	70	170M4313	170M4363			
	500	25000	170000	72	170M4314	170M4364			
	550	34000	230000	75	170M4315	170M4365			
	630	52000	350000	80	170M4316	170M4366			
	700	69500	465000	85	170M4317	170M4367			
2	800	105000	725000	95	170M4318	170M4368			
	400	11000	74000	65	170M5308	170M5358	1	0.620	page 72 (720087)
	450	15500	105000	70	170M5309	170M5359			
	500	21500	145000	75	170M5310	170M5360			
	550	28000	190000	80	170M5311	170M5361			
	630	41000	275000	90	170M5312	170M5362			
	700	60500	405000	95	170M5313	170M5363			
	800	86000	575000	105	170M5314	170M5364			
	900	125000	840000	110	170M5315	170M5365			
	1000	180000	1250000	115	170M5316	170M5366			
3	500	14000	95000	95	170M6308	170M6358	1	0.930	page 72 (720088)
	550	19500	135000	100	170M6309	170M6359			
	630	31000	210000	105	170M6310	170M6360			
	700	44500	300000	110	170M6311	170M6361			
	800	69500	465000	115	170M6312	170M6362			
	900	100000	670000	120	170M6313	170M6363			
	1000	140000	945000	125	170M6314	170M6364			
	1100	190000	1300000	130	170M6315	170M6365			
	1250	290000	1950000	140	170M6316	170M6366			
	1400	370000	2450000	155	170M6317	170M6367			
	1500	460000	3100000	160	170M6318	170M6368			

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

■ Watts loss provided at rated current.

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg



## Square Body - French Style


**690V/700V (IEC/U.L.) 40-1500A**



### Electrical Characteristics


#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

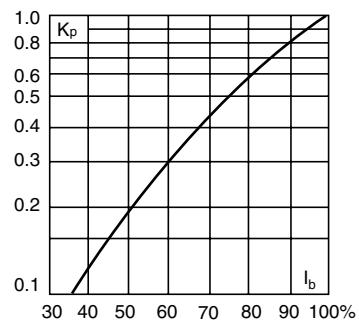


### Dimensions

French Style: Type -E/-, -EKN/-

Size	A	B	C	D	E	H	I	J
1*	50	102	76	59	45	18	9	13
1	50	111	86	69	53	25	11	11
2	50	126	91	77	61	30	13	12
3	51	126	91	92	76	36	13	13

Dimension in mm.  
1mm = 0.0394"    1" = 25.4mm

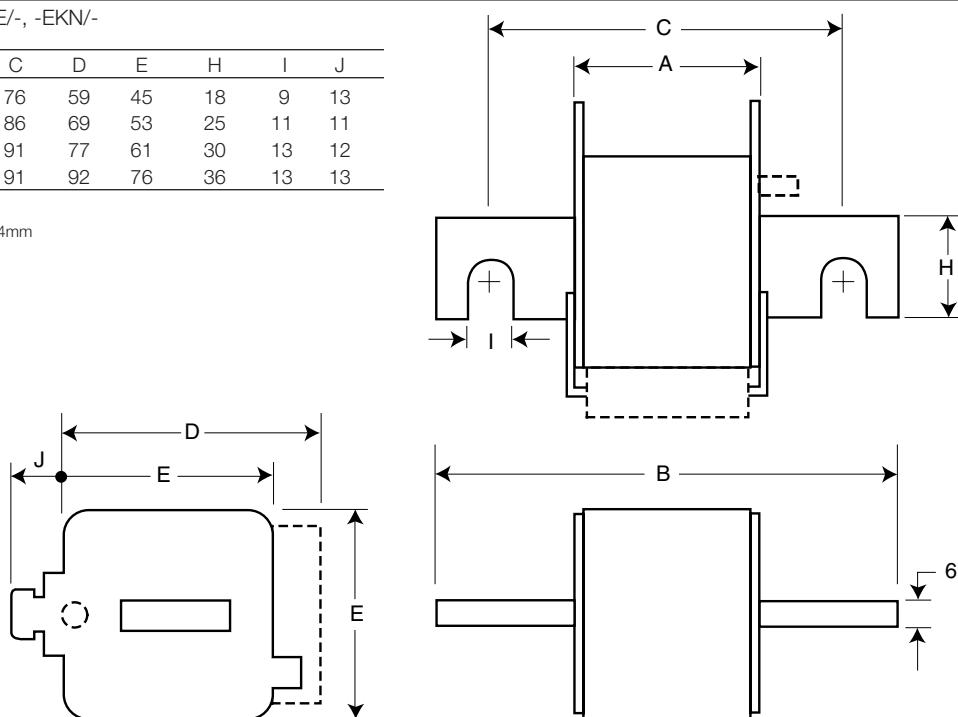



Bussmann®



**Square Body – US Style  
690V/700V (IEC) 40-2000A**



Electrical Characteristics				Ordering Information						Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	-FU/-Without Indicator	-FKE-/Type K Indicator for Micro	-FU/115 Without Indicator	-FKE/115 Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
		Pre-arc	Clearing at 660V								
1*	40	40	270	9	170M3608	170M3658	170M3708	170M3758	1	0.340	page 71 (720089)
	50	77	515	11	170M3609	170M3659	170M3709	170M3759			
	63	115	770	14	170M3610	170M3660	170M3710	170M3760			
	80	185	1250	18	170M3611	170M3661	170M3711	170M3761			
	100	360	2450	21	170M3612	170M3662	170M3712	170M3762			
	125	550	3700	26	170M3613	170M3663	170M3713	170M3763			
	160	1100	7500	30	170M3614	170M3664	170M3714	170M3764			
	200	2200	15000	35	170M3615	170M3665	170M3715	170M3765			
	250	4200	28500	40	170M3616	170M3666	170M3716	170M3766			
	315	7000	46500	50	170M3617	170M3667	170M3717	170M3767			
	350	10000	68500	55	170M3618	170M3668	170M3718	170M3768			
	400	15000	105000	60	170M3619	170M3669	170M3719	170M3769			
	450	21000	140000	65	170M3620	170M3670	170M3720	170M3770			
	500	27000	180000	70	170M3621	170M3671	170M3721	170M3771			
	550	34000	230000	75	170M3622	170M3672	170M3722	170M3772			
	630	48500	325000	80	170M3623	170M3673	170M3723	170M3773			
1	200	1650	11500	45	170M4608	170M4658	170M4708	170M4758	1	0.500	page 71 (720090)
	250	3100	21000	55	170M4609	170M4659	170M4709	170M4759			
	315	6200	42000	58	170M4610	170M4660	170M4710	170M4760			
	350	8500	59000	60	170M4611	170M4661	170M4711	170M4761			
	400	13500	91500	65	170M4612	170M4662	170M4712	170M4762			
	450	17000	120000	70	170M4613	170M4663	170M4713	170M4763			
	500	25000	170000	72	170M4614	170M4664	170M4714	170M4764			
	550	34000	230000	75	170M4615	170M4665	170M4715	170M4765			
	630	52000	350000	80	170M4616	170M4666	170M4716	170M4766			
	700	69500	465000	85	170M4617	170M4667	170M4717	170M4767			
	800	105000	725000	95	170M4618	170M4668	170M4718	170M4768			
	±900	155000	±850000	100	170M4619	170M4669	170M4719	170M4769			
2	400	11000	74000	65	170M5608	170M5658	170M5708	170M5758	1	0.630	page 72 (720091)
	450	15500	105000	70	170M5609	170M5659	170M5709	170M5759			
	500	21500	145000	75	170M5610	170M5660	170M5710	170M5760			
	550	28000	190000	80	170M5611	170M5661	170M5711	170M5761			
	630	41000	275000	90	170M5612	170M5662	170M5712	170M5762			
	700	60500	405000	95	170M5613	170M5663	170M5713	170M5763			
	800	86000	575000	105	170M5614	170M5664	170M5714	170M5764			
	900	125000	840000	110	170M5615	170M5665	170M5715	170M5765			
	1000	180000	1250000	115	170M5616	170M5666	170M5716	170M5766			
	1100	245000	1600000	120	170M5617	170M5667	170M5717	170M5767			
	1250	365000	2400000	130	170M5618	170M5668	170M5718	170M5768			
3	500	14000	95000	95	170M6608	170M6658	170M6708	170M6758	1	0.950	page 72 (720092)
	550	19500	135000	100	170M6609	170M6659	170M6709	170M6759			
	630	31000	210000	105	170M6610	170M6660	170M6710	170M6760			
	700	44500	300000	110	170M6611	170M6661	170M6711	170M6761			
	800	69500	465000	115	170M6612	170M6662	170M6712	170M6762			
	900	100000	670000	120	170M6613	170M6663	170M6713	170M6763			
	1000	140000	945000	125	170M6614	170M6664	170M6714	170M6764			
	1100	190000	1300000	130	170M6615	170M6665	170M6715	170M6765			
	1250	290000	1950000	140	170M6616	170M6666	170M6716	170M6766			
	1400	370000	2450000	155	170M6617	170M6667	170M6717	170M6767			
	1500	460000	3100000	160	170M6618	170M6668	170M6718	170M6768			
	1600	580000	3900000	160	170M6619	170M6669	170M6719	170M6769			
	±1800	880000	±5250000	165	170M6620	170M6670	170M6720	170M6770			
	±2000	1150000	±6350000	175	170M6621	170M6671	170M6721	170M6771			

■ Interrupting rating 200kA (Estimated 300kA) RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) ±600V ±550V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.

1 kg = 2.2 lbs. 1 lb = 0.45 kg




## Square Body - US Style 690V/700V (IEC) 40-2000A

### Electrical Characteristics

#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).




1) Rated voltage 600V

2) Rated voltage 550V


#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

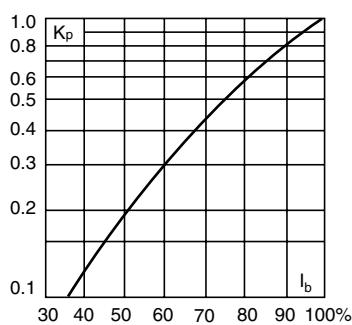

### Dimensions


US Style: Type -FU/-, -FKE/-, FU/115-, -FKE/115

Size	A	B	$B^{\$}$	C1	$C1^{\$}$	C2	$C2^{\$}$	D	E	H	I
1*	50	110	148	85	123	72	110	59	45	20	10
1	50	136	157	104	126	78	100	69	53	25	14
2	50	135	159	105	125	78	99	77	61	25	14
3	51	135	155	106	125	77	97	92	76	36	16

<sup>\$</sup>Valid for fuses type -FU/115 & -FKE/115

Dimension in mm.

1mm = 0.0394" 1" = 25.4mm

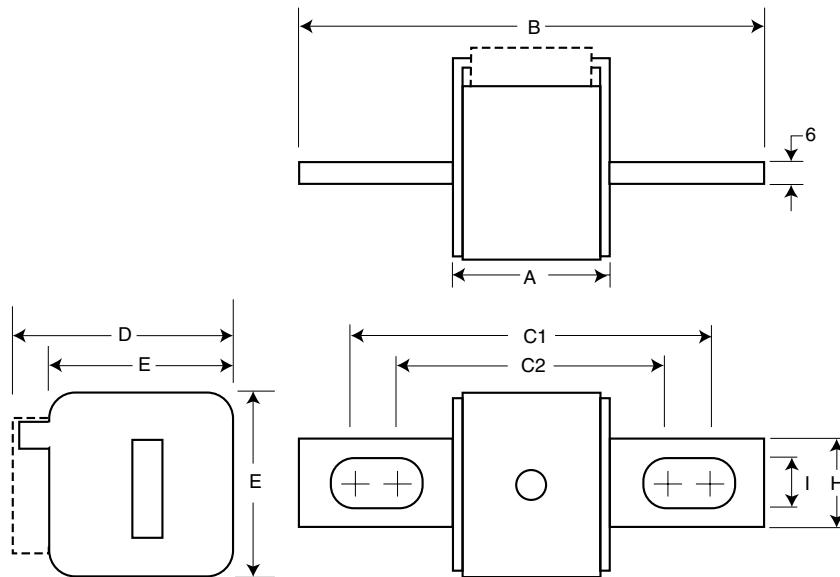



Bussmann®



**Square Body - US-Style  
1000V (IEC) 50-1400A**

Electrical Characteristics						Ordering Information			Curves
Size	Rated Voltage	Rated Current RMS-Amps	I <sup>t</sup> (A <sup>2</sup> s)		Watts Loss	-FKE/115 Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
			Pre-arc	Clearing at Rated Voltage					
1*	1000	50	135	815	20	170M3531	2	0.85	Page 74 or (720093)
	1000	63	215	1300	25	170M3532			
	1000	80	460	2750	30	170M3533			
	1000	100	860	5100	35	170M3534			
	1000	125	1450	8600	40	170M3535			
	1000	160	2850	17500	45	170M3536			
	1000	200	4950	29500	48	170M3537			
	1000	250	9550	57000	50	170M3538			
	1000	315	21500	130000	60	170M3539			
	1000	350	29000	175000	65	170M3540			
1	1000	400	42000	250000	70	170M3541	2	1.4	Page 75 or (720094)
	1000	160	2200	13500	40	170M4531			
	1000	200	4150	24500	45	170M4532			
	1000	250	7750	46000	52	170M4533			
	1000	315	16500	98500	60	170M4534			
	1000	350	21500	130000	65	170M4535			
	1000	400	31000	185000	70	170M4536			
	1000	450	44500	265000	80	170M4537			
	1000	500	63000	375000	85	170M4538			
	1000	550	84500	500000	90	170M4539			
2	1000	630	125000	755000	98	170M4540	2	1.5	Page 75 or (720095)
	1000	250	6750	40000	65	170M5531			
	1000	315	13500	81500	75	170M5532			
	1000	350	16500	99000	80	170M5533			
	1000	400	26000	155000	85	170M5534			
	1000	450	35500	210000	90	170M5535			
	1000	500	49500	295000	95	170M5536			
	1000	550	66000	390000	100	170M5537			
	1000	630	93500	555000	110	170M5538			
	1000	700	130000	770000	115	170M5539			
3	1000	800	195000	1200000	125	170M5540	1	1.25	Page 76 or (720096)
	1000	315	9200	54500	90	170M8531			
	1000	350	13000	77500	95	170M8532			
	1000	400	19000	115000	105	170M8533			
	1000	450	27000	160000	107	170M8534			
	1000	500	37500	225000	110	170M8535			
	1000	550	52000	310000	115	170M8536			
	1000	630	82500	490000	120	170M8537			
	1000	700	115000	700000	125	170M8538			
	1000	800	170000	1050000	135	170M8539			
	1000	900	250000	1500000	145	170M8540			
	1000	1000	340000	2050000	150	170M8541			
	1000	1100	460000	2750000	155	170M8542			
	1000	1250	575000	3400000	175	170M8543			
	900	1400	795000	4200000	185	170M8544			

1 kg = 2.2 lbs. 1 lb = 0.45 kg

- Interrupting rating 150kA (Estimated 300kA) RMS Symmetrical.
- Watts loss provided at rated current.
- Microswitch ordered separately. See accessories on page 68-69..






## Square Body - US-Style 1000V (IEC) 50-1400A

### Electrical Characteristics

#### Total clearing $I^2t$


The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).

\*Rated voltage 900V




#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage  $E_g$ , (RMS) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

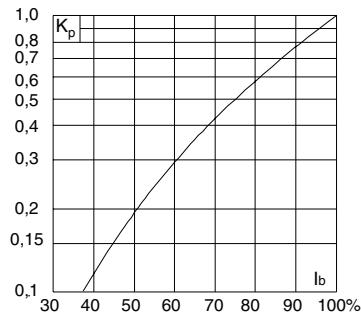


### Dimensions

DIN 43 653: Type -FKE/115

Size	B	C1	C2	D	E	H	I
1*FKE/115	156	130	101	59	45	20	10
1FKE/115	160	127	102	69	53	25	14
2FKE/115	160	127	102	77	61	25	14
3FKE/115	159	128	101	92	76	36	16

Dimensions in mm  
1 mm = 0.0394" 1" = 25.4 mm

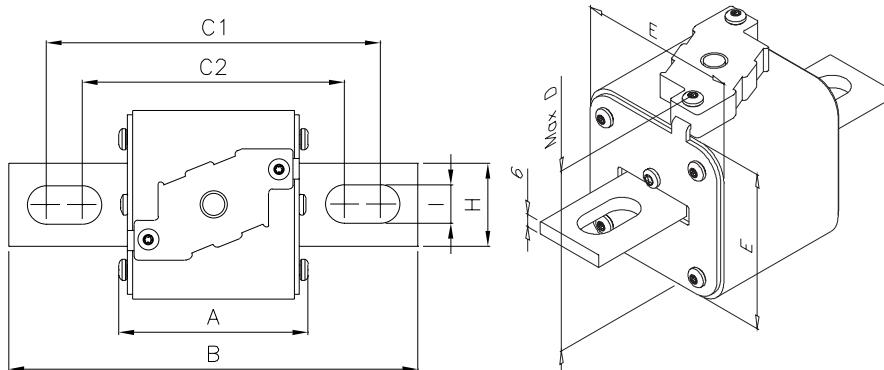



Bussmann®



**Square Body – US Style  
1250V/1300V (IEC/U.L.) 50-1400A**



Size	Rated Current RMS-Amps	Electrical Characteristics			Watts Loss	Ordering Information			Curves	
		Pre-arc	Clearing at 1000V	Clearing at 1250V		-FU/115 Without Indicator	-FKE/115 Type K Indicator for Micro	Carton Qty.	Carton Weight (kg)	See Page or (Datasheet)
1*	50	135	815	1100	15	170M3688	170M3738	1	0.425	page 76 (720097)
	63	215	1300	1750	20	170M3689	170M3739			
	80	420	2500	3350	25	170M3690	170M3740			
	100	750	4450	5950	30	170M3691	170M3741			
	125	1450	9000	11500	35	170M3692	170M3742			
	160	2600	16000	21000	40	170M3693	170M3743			
	200	5150	31000	41000	45	170M3694	170M3744			
	250	9200	54500	73000	55	170M3695	170M3745			
	315	18500	115000	150000	60	170M3696	170M3746			
	350	27000	165000	220000	65	170M3697	170M3747			
1	160	1900	11500	15500	45	170M4688	170M4738	1	0.675	page 77 (720098)
	200	3800	22500	30000	50	170M4689	170M4739			
	250	7750	46000	61500	60	170M4690	170M4740			
	315	15000	90000	120000	65	170M4691	170M4741			
	350	20000	125000	165000	70	170M4692	170M4742			
	400	29500	175000	235000	75	170M4693	170M4743			
	450	42000	250000	335000	80	170M4694	170M4744			
	†500	69500	340000		85	170M4695	170M4745			
	†550	95000	465000		95	170M4696	170M4746			
	‡630	130000	660000		100	170M4697	170M4747			
2	250	6500	38500	51500	65	170M5688	170M5738	1	0.740	page 77 (720099)
	280	9350	55500	74500	70	170M5689	170M5739			
	315	13000	77500	105000	75	170M5690	170M5740			
	350	16500	97500	135000	80	170M5691	170M5741			
	400	23000	140000	180000	85	170M5692	170M5742			
	450	34000	205000	270000	90	170M5693	170M5743			
	500	48000	285000	380000	95	170M5694	170M5744			
	550	62000	370000	495000	100	170M5695	170M5745			
	630	115000	575000	730000	110	170M5696	170M5746			
	†700	160000	795000		115	170M5697	170M5747			
	†800	245000	1200000		120	170M5698	170M5748			
	†900	360000	1750000		125	170M5699	170M5749			
	‡1000	480000	2350000		135	170M5700	170M5750			
3	315	9500	58000	77500	185	170M6688	170M6738	1	1.250	page 78 (720100)
	350	13500	81500	110000	90	170M6689	170M6739			
	400	19500	120000	160000	95	170M6690	170M6740			
	450	31000	185000	245000	100	170M6691	170M6741			
	500	39000	235000	310000	105	170M6692	170M6742			
	550	55000	325000	435000	110	170M6693	170M6743			
	630	83500	495000	665000	115	170M6694	170M6744			
	700	115000	705000	940000	120	170M6695	170M6745			
	800	205000	995000	1300000	125	170M6696	170M6746			
	900	305000	1500000	1900000	130	170M6697	170M6747			
	¥1000	450000	2150000		135	†170M6698	†170M6748			
	¥1100	575000	2800000		140	†170M6699	†170M6749			
	¥1250	810000	3950000		145	†170M6700	†170M6750			
	¥1400	1250000	6000000		150	†170M6701	†170M6751			

¥ U.L. Recognition at 1000V.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

■ Interrupting rating 100kA RMS Symmetrical.

■ Watts loss provided at rated current.

■ Rated voltage (IEC) †1100 ‡1000V (Consult Bussmann for U.L. Recognition/ CSA Component Acceptance status.)

■ Microswitch indicator ordered separately. See accessories on pages 68-69.




# Square Body - US Style 1250V/1300V (IEC/U.L.) 50-1400A



## Electrical Characteristics


### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (RMS).

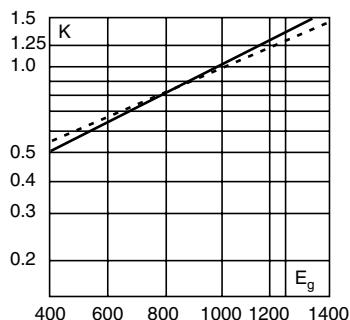


### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (RMS) at a power factor of 15%.



### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

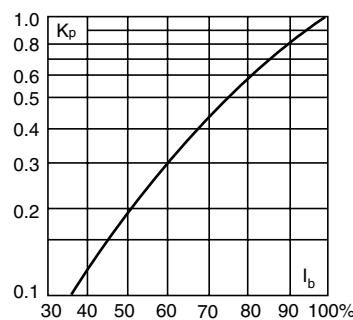

Dashed lines apply to the following amperages:


Size	1*	1	2	3
Amp	400	500-630	630-1000	800-1400

## Dimensions

US Style: Type -FU/115, -FKE/115

Size	B	C1	C2	D	E	H	I
1*	156	130	101	59	45	20	10
1	160	127	102	69	53	25	14
2	160	127	102	77	61	25	14
3	159	128	101	92	76	36	16

Dimension in mm.  
1mm = 0.0394" 1" = 25.4mm

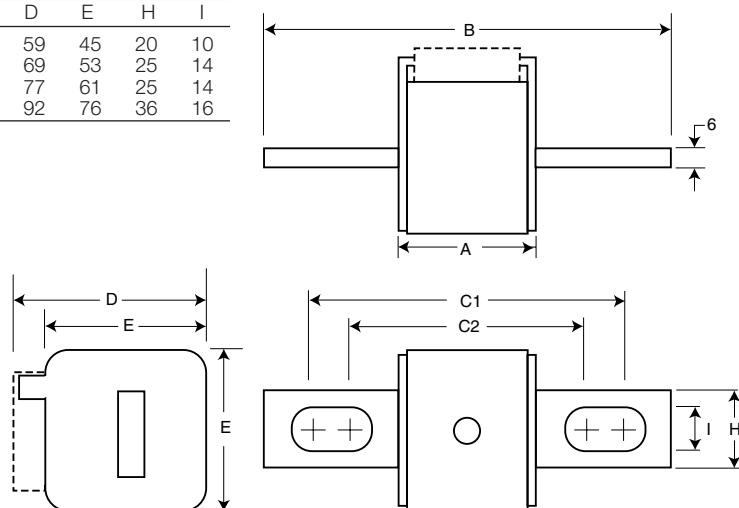



Bussmann®



## Square Body – Accessories Indicator System



### Indicators

Typower ZILOX fuses are available with three different indicator systems.

#### Visual Indicator

The indicator situated in one cover plate is clearly visible as soon as the fuse has operated. The minimum voltage for operating the indicator is 20V.

#### Type T Indicator

The indicator is situated on one cover plate with a cover plate tag to accommodate an auxiliary switch. The minimum voltage for operating the indicator is 20V. A special low voltage indicator (1.5V) is available on request.

#### Type K Indicator

This indicator is situated on the fuse body. It is covered by an adaptor for snap-on mounting of an auxiliary switch. The operating voltage of the indicator is 1.5V. As a matter of safety, the factory mounted adaptor must not be removed from the fuse.

### Microswitch

The Typower ZILOX fuses with either type T indicator or type K indicator can be equipped with a microswitch for remote electrical indication of fuse operations. All microswitches have one normally open and one normally closed contact. Ratings are 2A, 250 Vac.



Microswitch	6.3 x 0.8 mm Lugs	2.8 x 0.5 mm Lugs	Indicator Type
170H0235	x		T
170H0236	x		T
170H0237		x	T
170H0238		x	T
170H0069	x		K

Size	DIN 43 653		DIN 43 620		French Style		Flush End		US Style
	Type T	Type K	Type T	Type K	Type T	Type K	Type T	Type K	Type K
000	170H0236 170H0238		170H0236 170H0238						
00	170H0235 170H0237						170H0235 170H0237		
1*	170H0235 170H0237	170H0069	170H0235 170H0237		170H0236 170H0238	170H0069		170H0069	170H0069
1	170H0235 170H0237	170H0069			170H0236 170H0238	170H0069		170H0069	170H0069
2	170H0235 170H0237	170H0069	170H0235 170H0237		170H0236 170H0238	170H0069		170H0069	170H0069
3	170H0235 170H0237	170H0069	170H0236 170H0238		170H0236 170H0238	170H0069		170H0069	170H0069
4								170H0069	
23								170H0069	
24								170H0069	

BIF document: 720034



## Square Body – Accessories Fuse Bases (Blocks)

### DIN 43 653 Fuse Bases

For the Typower ZILOX fuses according to DIN 43 653, the following fuse bases are available:

Part Number	Max. Voltage	Rated Current	Center Distance
170H3003	1000V	630A	80mm
170H3004	1000V	1250A	80mm
170H3005	1400V	630A	110mm
170H3006	1400V	1250A	110mm

The fuse bases rated 1250A can also be used for the fuses with higher rated current if the maximum load current is derated according to the table below:


Fuse Rating	Max. Load Current In Fuse Base
1400A	1325A
1500A	1400A
1600A	1500A
1800A	1650A
2000A	1800A

Fixed Center Base Style	Max. Voltage	Max. Fuse Current Rating	Fuse Size
170H1007	1000V	400A	00, 000
170H1013	660V	200A	0000,000

U.L. Recognized to U.L. 512.



DIN 43 653

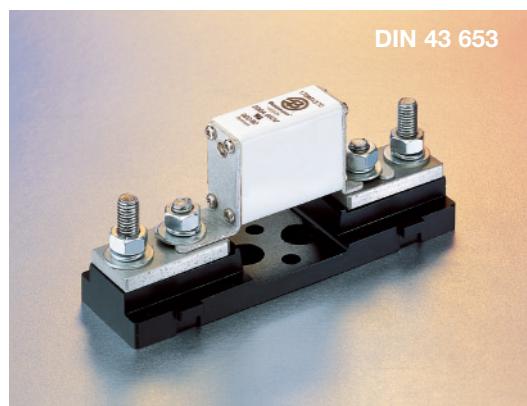

DIN 43 653

### Universal Fuse Bases


For the Typower ZILOX fuses according to DIN 43 653, French style and North American style, the following fuse bases are available:

Modular Base Style	Max. Voltage	Max. Fuse Current Rating	BIF Document
1BS101	600V	100A	1206
1BS102	600V	400A	1207
1BS103	600V	400A	1208
1BS104	600V	600A	1209
BH-0xxx	700V	100A	1200
BH-1xxx	2500V	400A	1201
BH-2xxx	5000V	400A	1202
BH-3xxx	1250V	700A	1203

Modular fuse bases are U.L. Recognized to U.L. 512 and meet the spacing requirements of U.L. 347. Contact Bussmann sales representative for more complete ordering information.

### DIN 43 620 Fuse Bases

For fuse bases used with Typower ZILOX fuses according to DIN 43 620, please contact your local Bussmann sales representative.

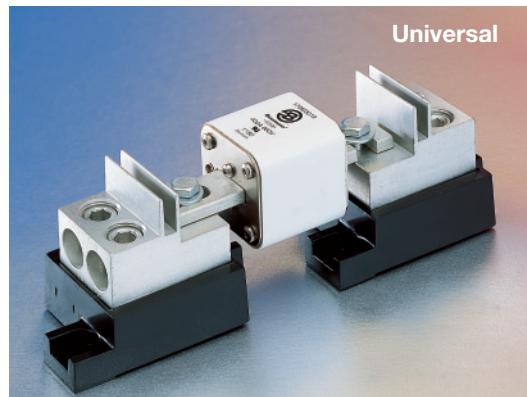

Universal

BIF document: 720036



For complete specification data, visit our Web site at [www.bussmann.com](http://www.bussmann.com)  
or call Bussmann Information Fax ~ 636.527.1450




Bussmann®



## Square Body Curves


### Size 000: 690V (10-315)A

#### Time-Current Curve

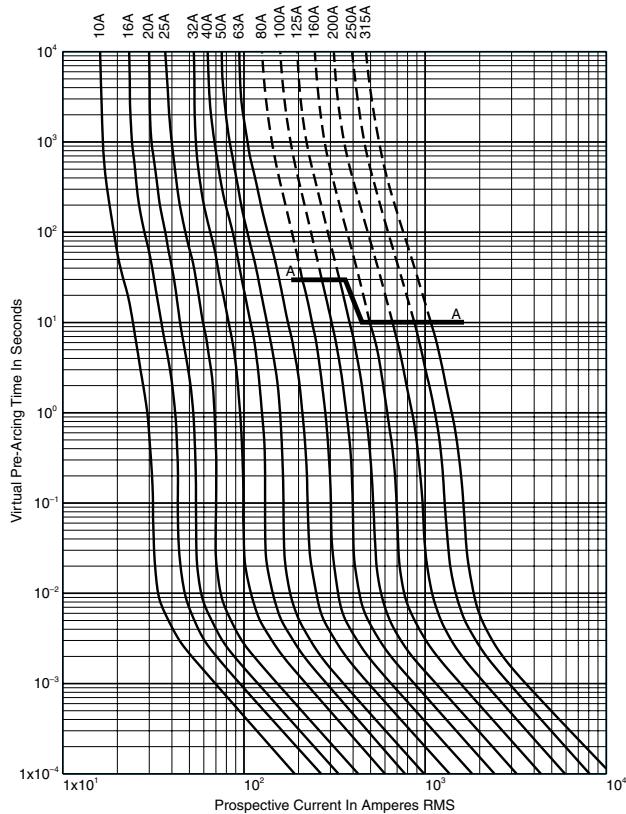


### Size 00: 690V (25-400)A


#### Time-Current Curve

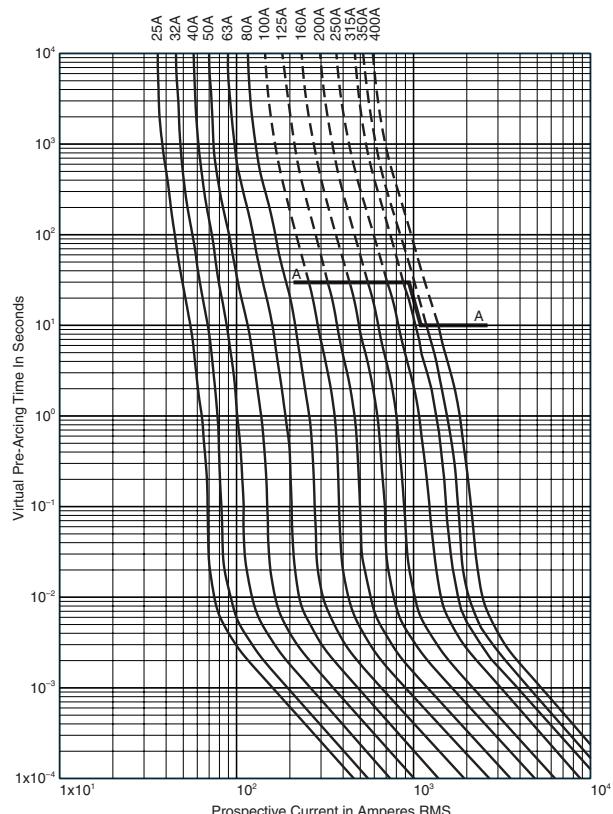

#### Peak Let-Through Curve

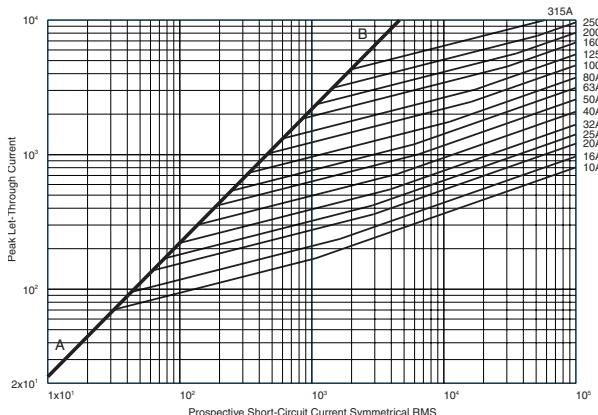

#### Peak Let-Through Curve

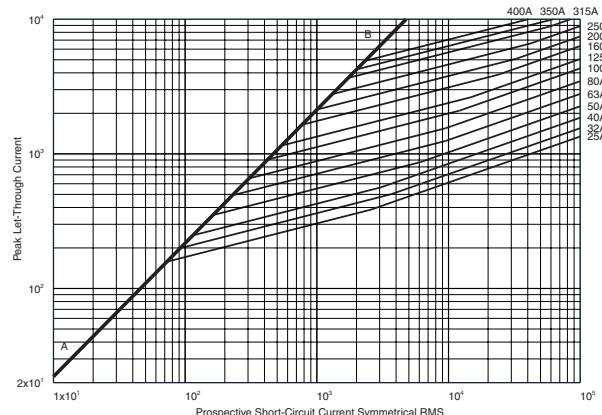





# Square Body Curves

**Size 1\*: 690V (40-630)A**

## Time-Current Curve

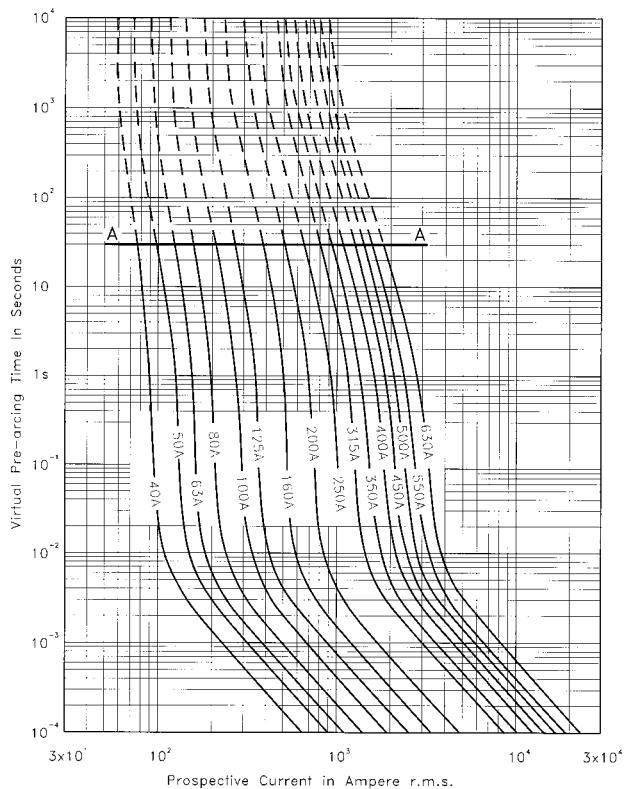


## Peak Let-Through Curve

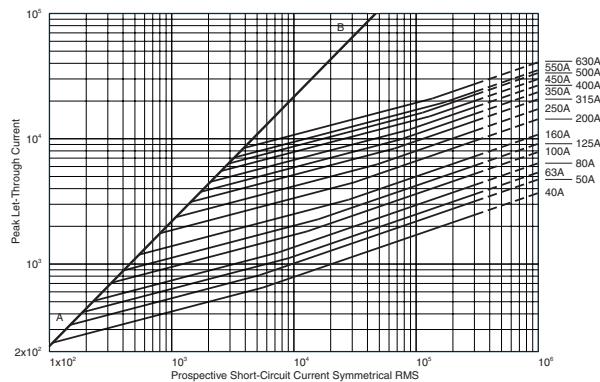


## **Size 1: 690V (200-900)A**

## Time-Current Curve

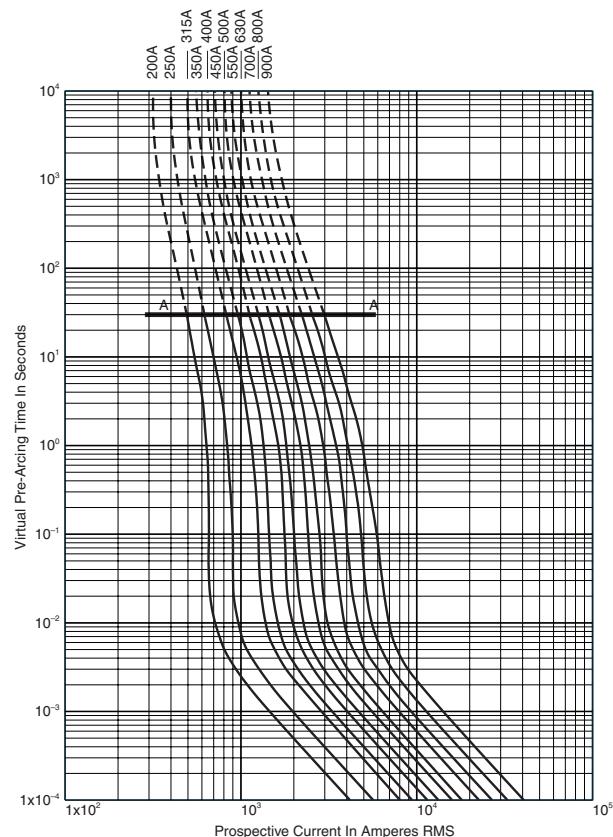

## Peak Let-Through Curve

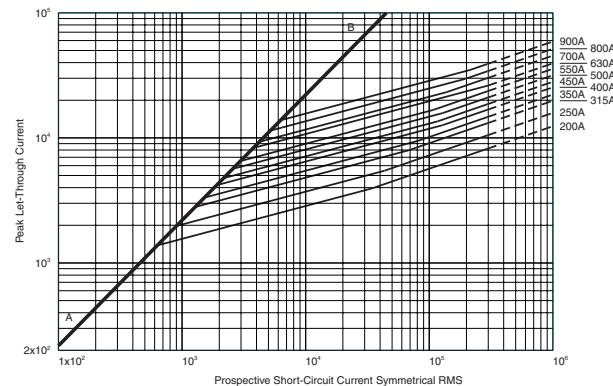

900 amp fuse is derated to 550V (IEC).





Bussmann®




## Square Body

# Curves


### Size 2: 690V (400-1250)A

#### Time-Current Curve

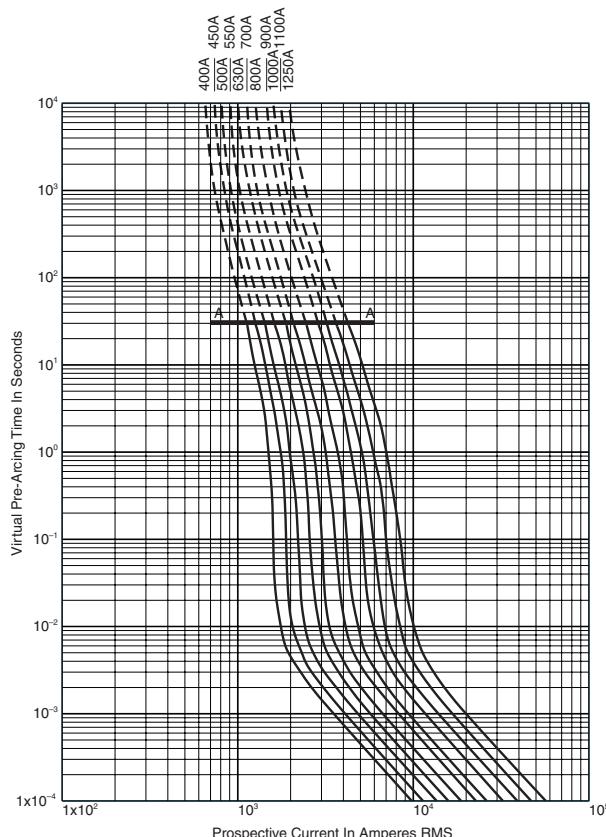


### Size 3: 690V (500-2000)A


#### Time-Current Curve

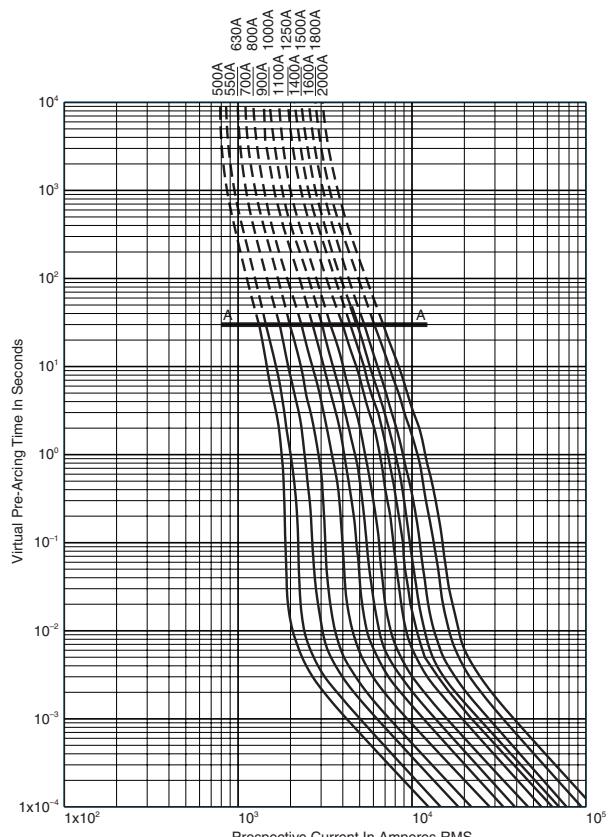

#### Peak Let-Through Curve

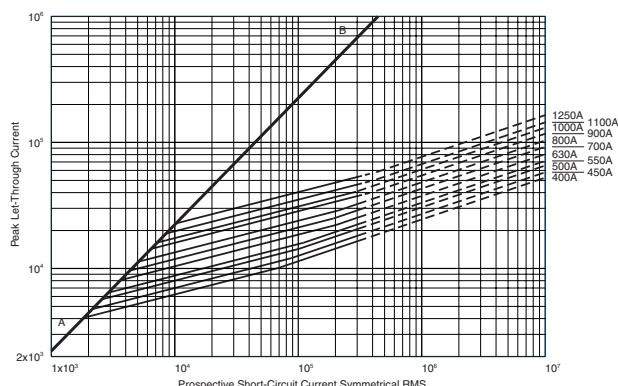

#### Peak Let-Through Curve

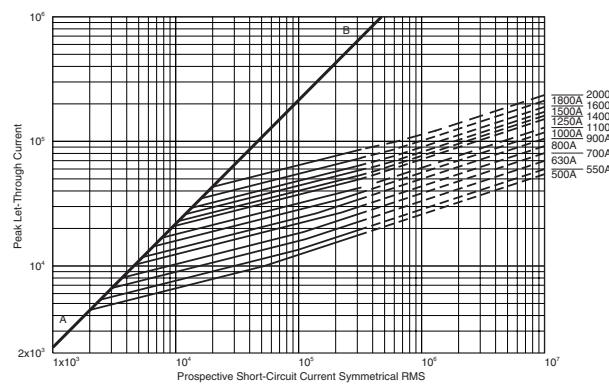


1800 amp fuse is derated to 600V (IEC).  
2000 amp fuse is derated to 550V (IEC).




# Square Body Curves

## **Size 4: 690V (1000-4000)A**

## Time-Current Curve

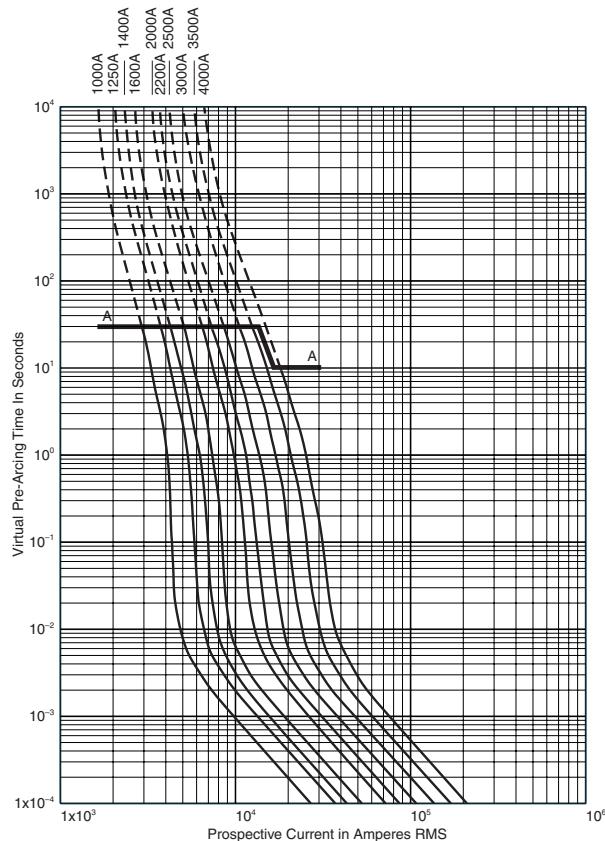


## Peak Let-Through Curve

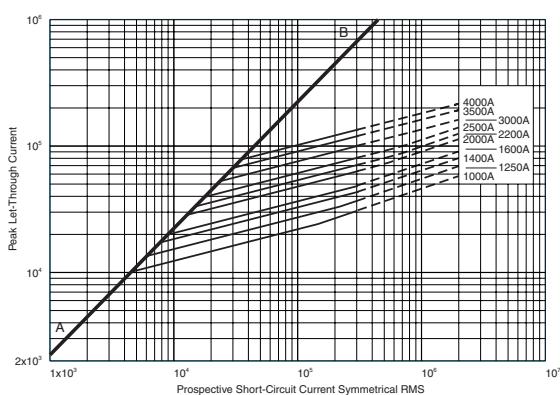


4000 amp fuse is derated to 500V (IEC).

## **Size 00: 1000V (20-315)A**

## Time-Current Curve

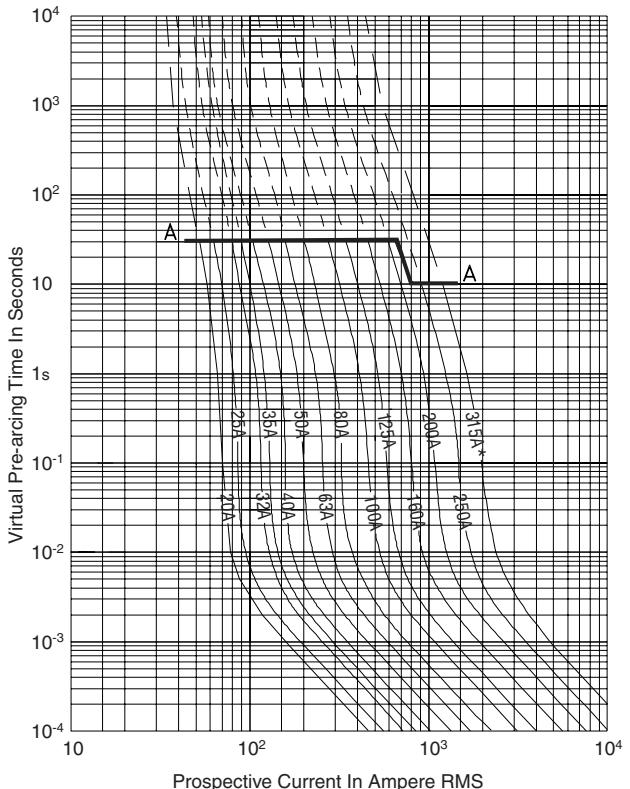

## Peak Let-Through Curve

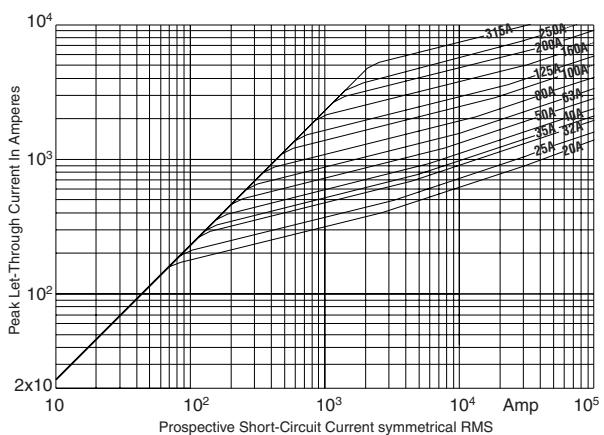

\* 315 amp fuse is derated to 900V






Bussmann®



## Square Body Curves


### Size 00: 1000V (20-225)A

Time-Current Curve

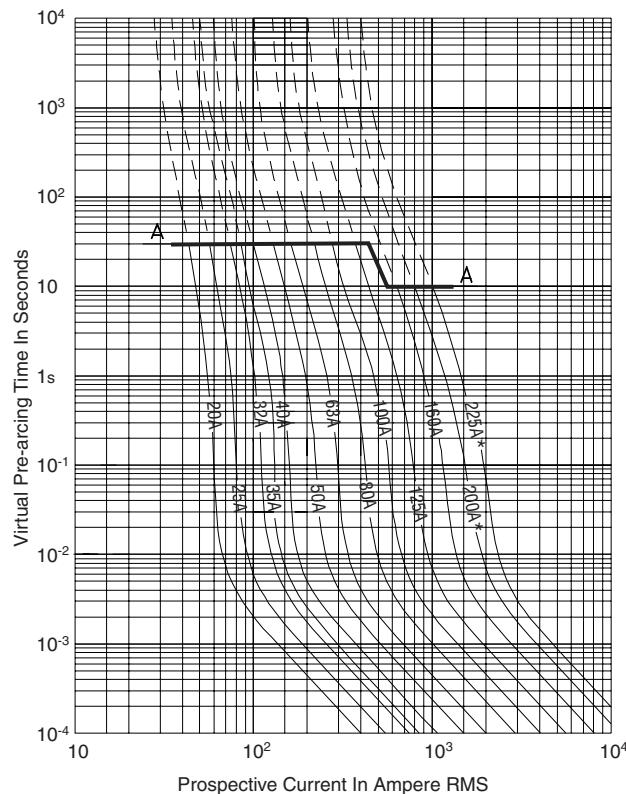


### Size 1\*: 1000V (50-400)A


Time-Current Curve

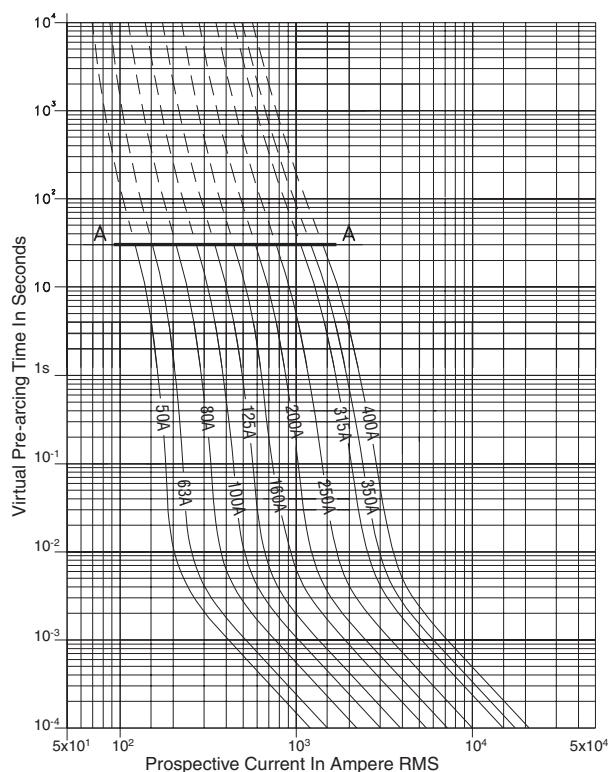

### Peak Let-Through Curve

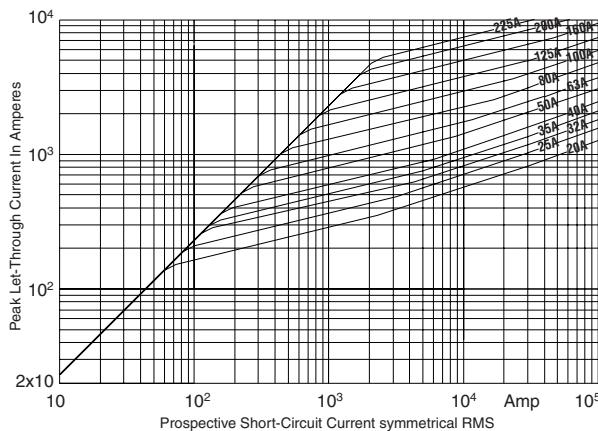

### Peak Let-Through Curve

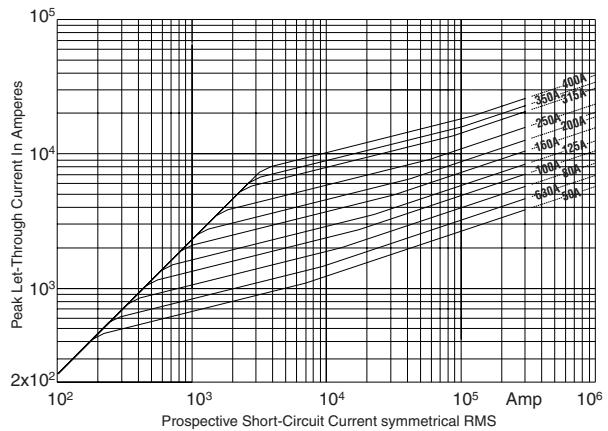

\* 200-225 amp fuses are derated to 900V


BIF document: 17058506



## Square Body Curves


### Size 1: 1000V (160-630)A

Time-Current Curve

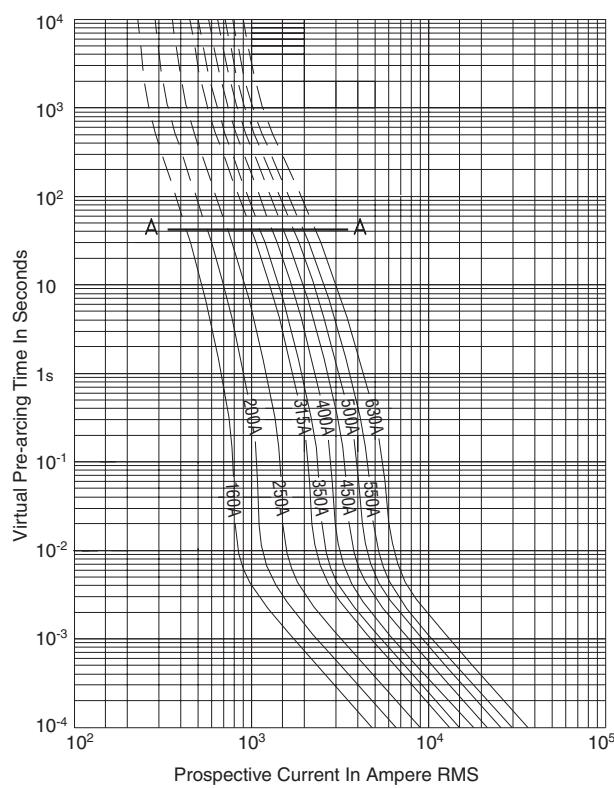


### Size 2: 1000V (250-800)A


Time-Current Curve

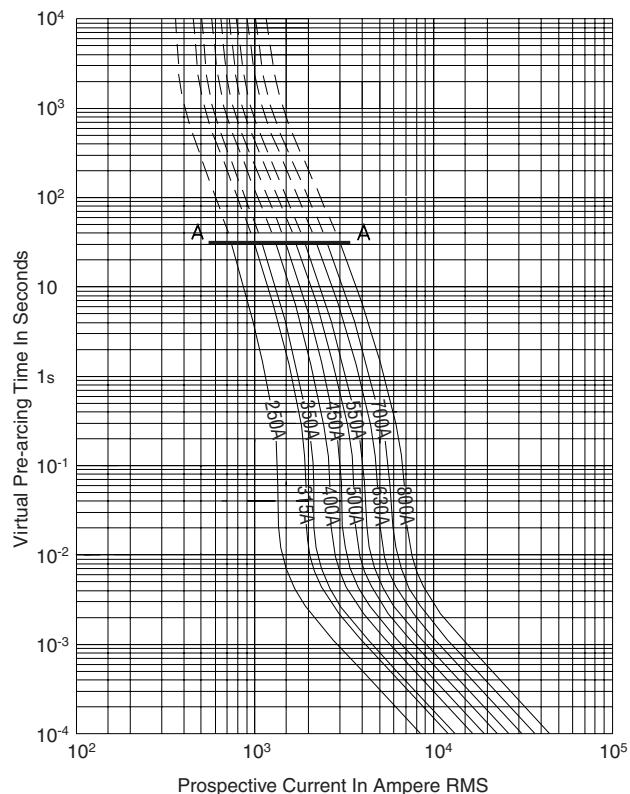

### Peak Let-Through Curve

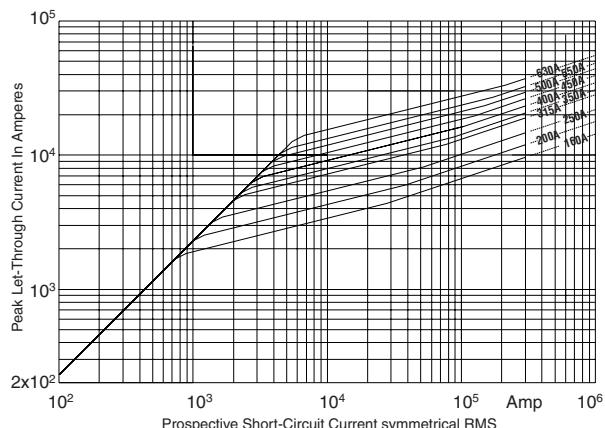

### Peak Let-Through Curve

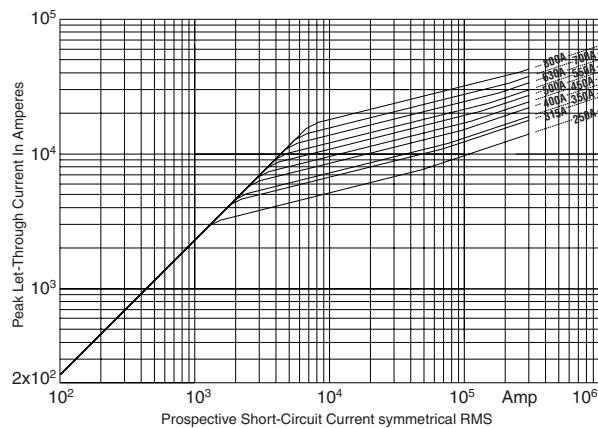




## Square Body Curves


### Size 3: 1000V (315-1400)A

Time-Current Curve

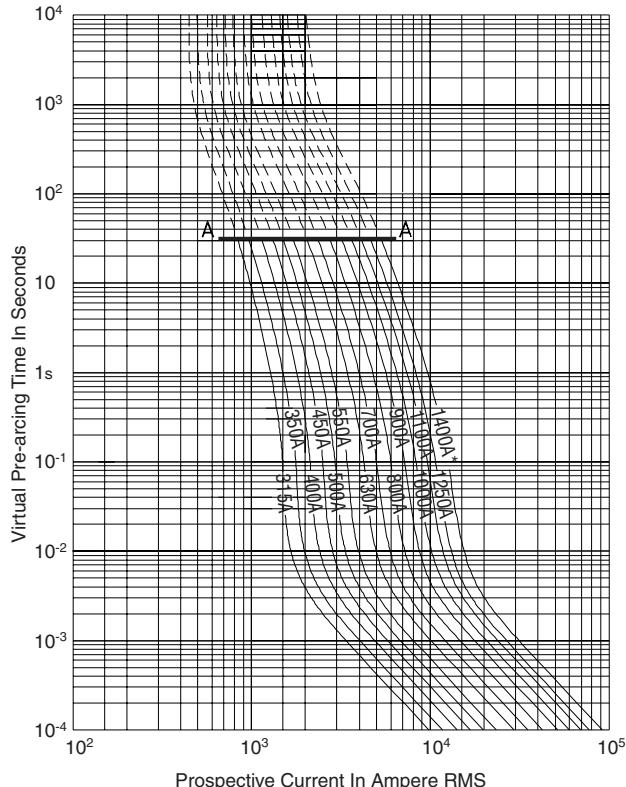


### Size 1\*: 1250V (50-400)A


Time-Current Curve

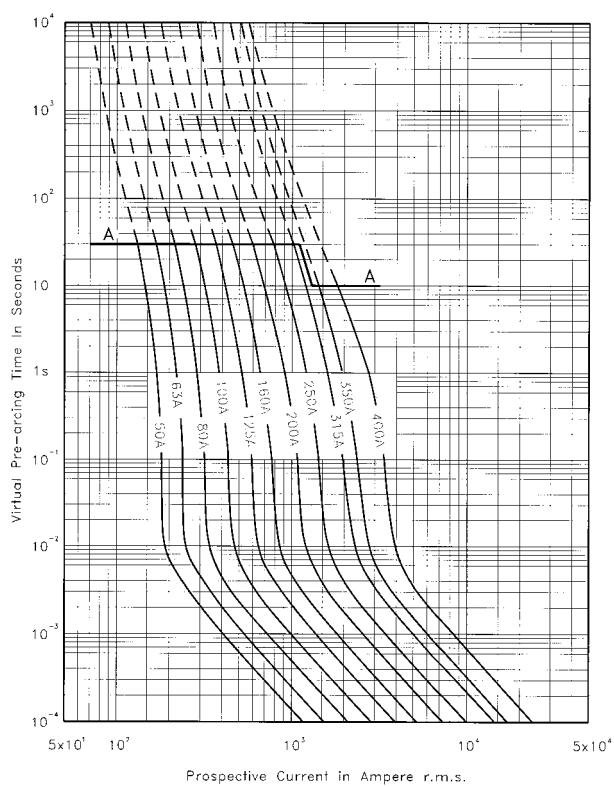

### Peak Let-Through Curve

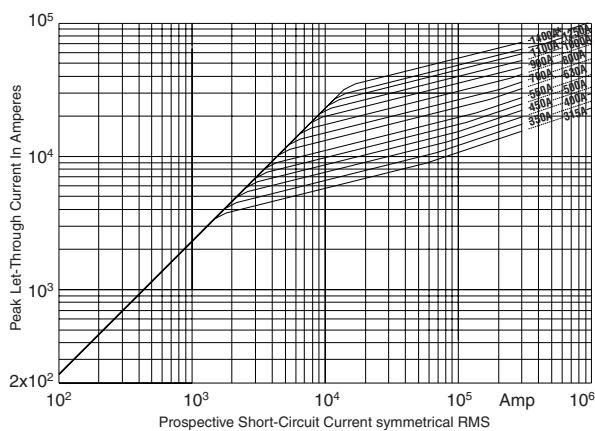

### Peak Let-Through Curve

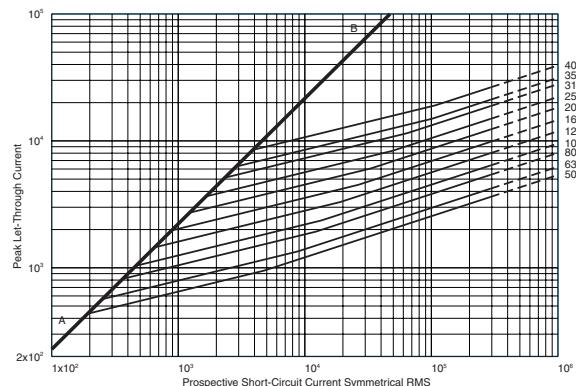

\* 1400 amp fuses are derated to 900V


BIF document: 17058570

BIF document: 17056630




## Square Body Curves


### Size 1: 1250V (160-630)A Time-Current Curve

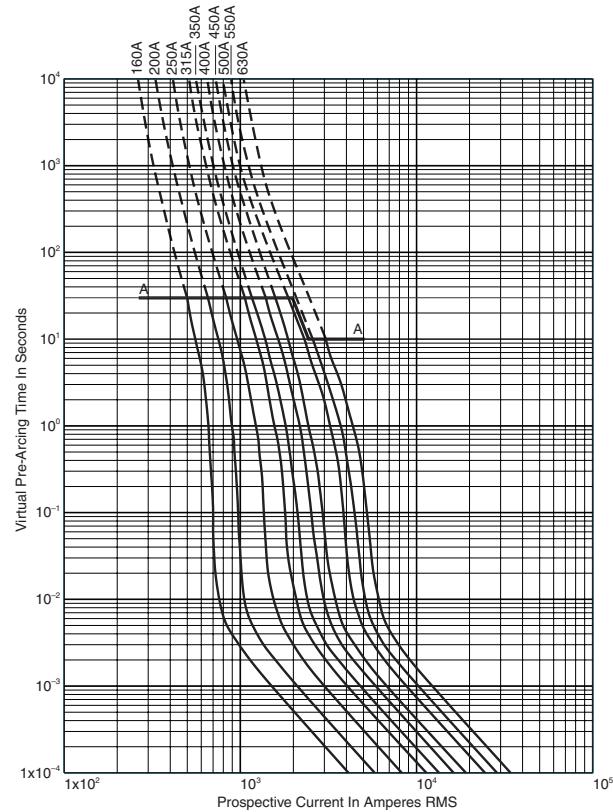

### Size 2: 1250V (250-1000)A Time-Current Curve

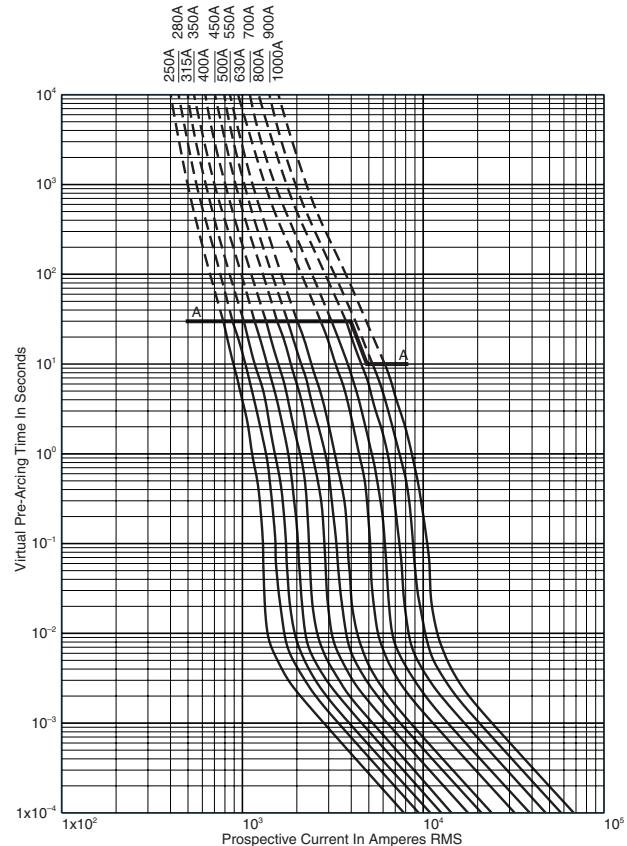


### Peak Let-Through Curve

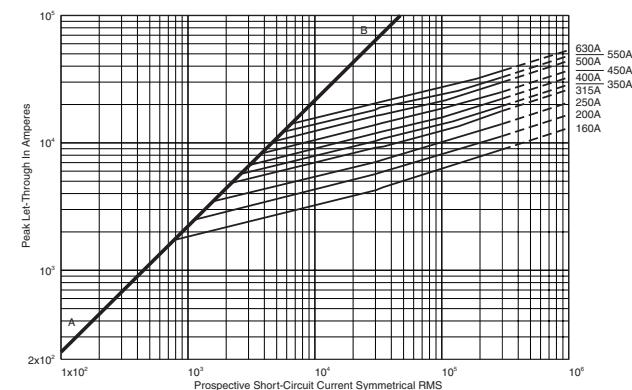

630 amp fuse is derated to 1100V (IEC).

### Peak Let-Through Curve

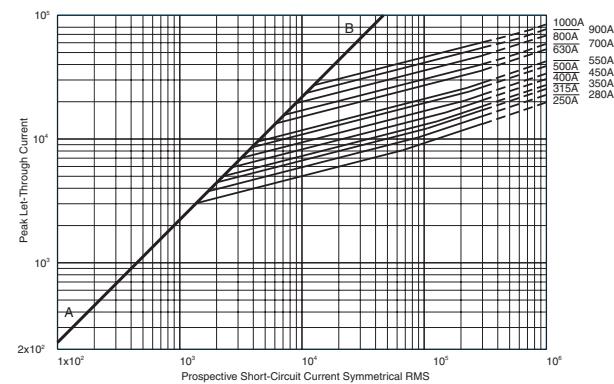

900-1000 amp fuses are derated to 1100V (IEC).






Bussmann®




## European Square Body Curves



### Size 3: 1250V (315-1400)A Time-Current Curve

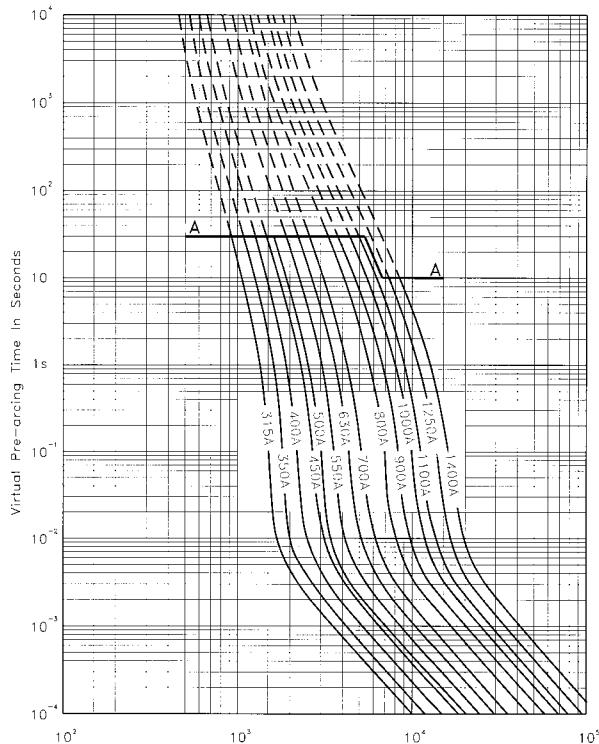

### Peak Let-Through Curve

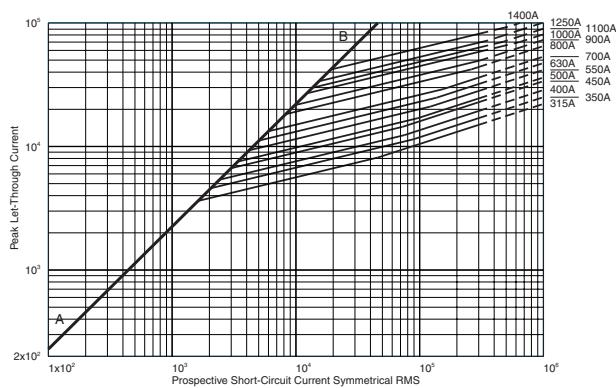

1250-1400 amp fuses are derated to 1100V (IEC).

BIF document: 17056636

